

# S500-A325

Trombetta's electronic controls are special modules designed to enhance solenoid performance by increasing force capability and reducing operating temperature. Trombetta's electronic controls for solenoids regulate the magnitude of electrical drive applied to the coil during the pull in and/or hold operation of the solenoid to optimize the performance of the solenoid.



## Nominal Module Input Voltage 120VAC 60HZ

### Nominal Pull

**Output Voltage:** 108VDC to solenoid

**Power Requirements:** Operating source voltage is 95-135 VAC. Current requirements as high as 20 Amps, (depending on coil selection)

**Trigger Input:** 90-130 VAC or 12-24 VDC. Module can be triggered from the source voltage (Aux in tied to main power in), or module can be triggered from a second source. *Note: Aux in circuitry is isolated from power circuitry.*

**Response Time:** 10 ms using separate trigger source, 40 ms when Aux in is hard wired to power source.

**Cycle Repetition Rate:** Repetition rate is dependent on coil selection. The module can cycle a 1500 watt coil at 10 second periods, 5 second on, followed by 5 second off time. At 2000 watts 20 second per period is the maximum repetition. In other words 1 on/off cycle every 20 second period.

### Coil Drive

**Capabilities:** The module can power a 2400 Watt coil maximum. This value will depreciate as the cycle time is reduced.

**Termination:** Beau connectors, 6-32 panhead.

**Indication:** Led will display 3 modes:  
\*Bright- pull mode  
\*Dim- hold mode  
\*Flashing- low power cut off since last trigger request.

**Environment:** -40° C to 70° C, 0-100% humidity, non condensing

### Low Voltage

**Cut Off:** 90 Volts

## Application Information


With the S500-A325 module has been designed to work properly with a (1) section coil. The module operates in the following manner. When a remote control signal is applied to the Aux input of the module it applies full voltage to the solenoid coil. After the actuation time (approximately 2.50 seconds) the module reduces the output voltage to the solenoid to 13% to 16% of the input voltage for continuous duty. This reduced voltage level is applied to the coil until the control signal is removed. This Trombetta module gives you the option of using AC or DC voltage for the Aux trigger signal. This module also offers an LED display. The LED will display if the module is in the pull or hold mode and will indicate lower power cut off since the last trigger request.



# Wiring Diagrams

**Figure 1** shows a typical wiring diagram when controlled by a low current, 120VAC signal to the Aux input. **Figure 2** shows a typical wiring diagram controlled by a low current, 12 to 24 VDC signal to the Aux input. **Figure 3** is controlled by the same signal which provides power to the solenoid.

**Dimensions:  
(Inches)**

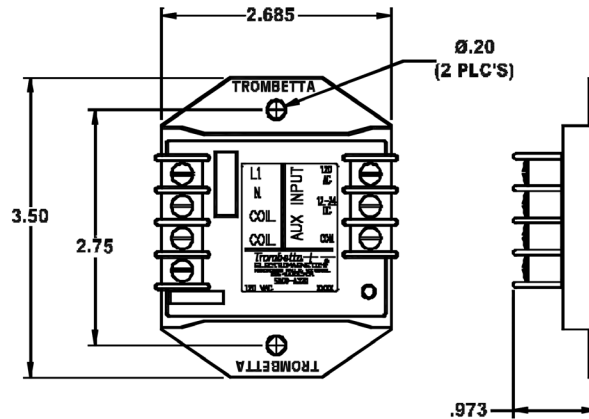

## Wiring Diagrams:

Figure 1

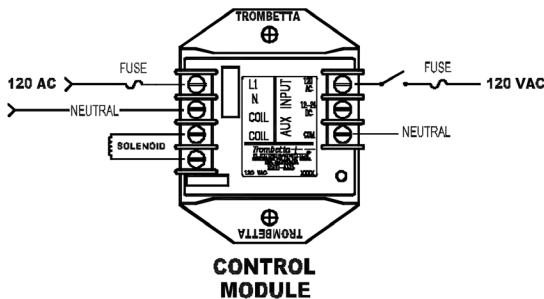


FIGURE #1 120 VAC CONTROL

S500-A325  
MODULE

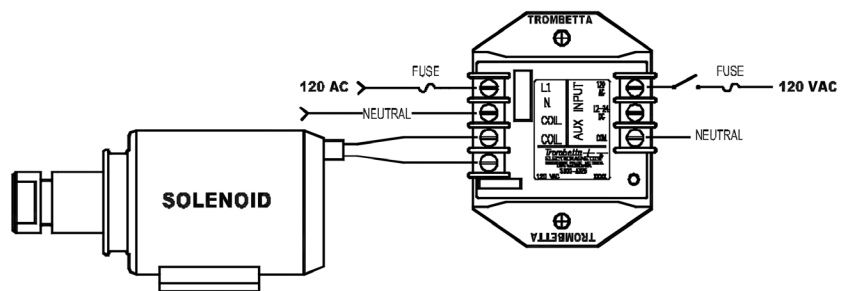


Figure 2

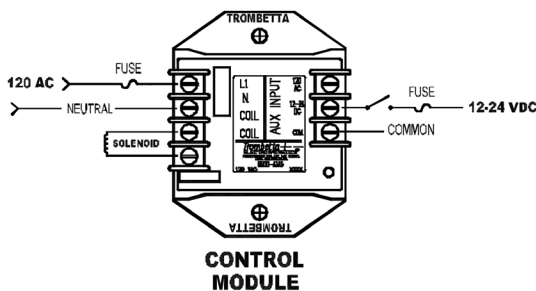


FIGURE #2 12-24 VDC CONTROL

S500-A325  
MODULE

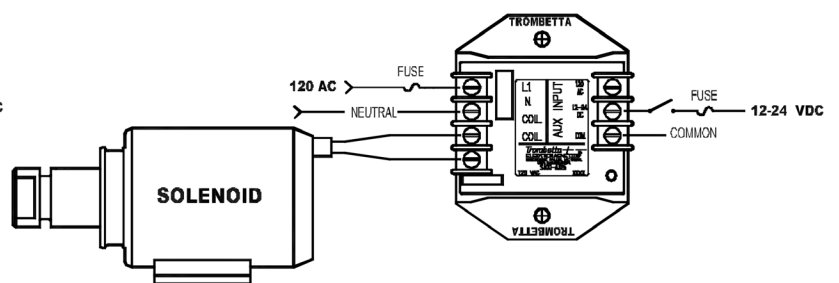


Figure 3

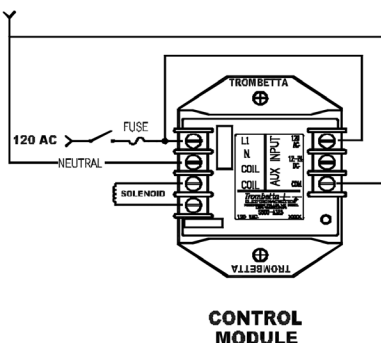


FIGURE #3 120 VAC LINE CONTROL

S500-A325  
MODULE

