




Terminals




5,08 mm

Drawings

PK 700/... /5,08-V vertical

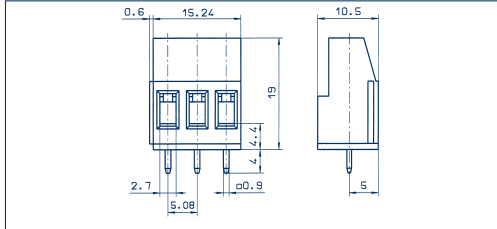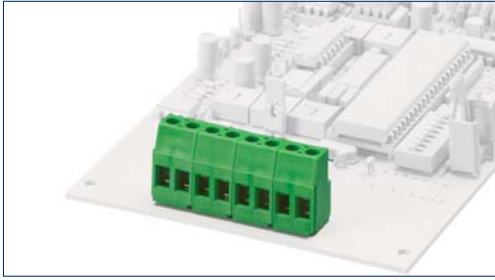

PK 700/... /5,08-H horizontal

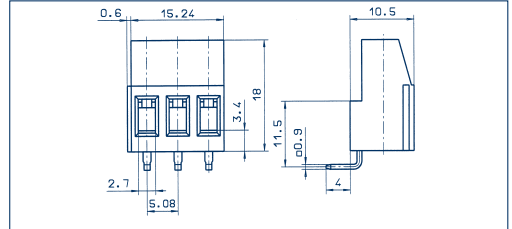

Connection principle

Dimensions

Spacing mm	5,08
Insulation stripping length mm	8,00
PCB hole diameter mm	1,30

Connection data

Single wire (solid) mm ²	4,00
Stranded wire (flexible) mm ²	2,50
Stranded wire (with ferrules) mm ²	2,50

Rating

Rated voltage V	300 V	250 V
Rated current A	20 A	24 A (T60)
Cross section max. AWG/mm ²	30-12	2,50
Rated surge voltage	—	2,00 kV
Rated torque/Screw size	—	0,50 Nm/M3
Contamination degree	—	—

Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	CuZn
Clamping cage/Eccentric	—
Contact pin	—
Cage tension spring	—
Wire protection	—
Soldering lug	Cu
Contact Spring	—

Order information

Standard colour(s)
(further colours on request, see page 5)

Strain-relief-clamp

Spacing mm	5,08
Insulation stripping length mm	8,00
PCB hole diameter mm	1,30
Single wire (solid) mm ²	4,00
Stranded wire (flexible) mm ²	2,50
Stranded wire (with ferrules) mm ²	2,50

Rated voltage V	300 V	250 V
Rated current A	20 A	24 A (T60)
Cross section max. AWG/mm ²	30-12	2,50
Rated surge voltage	—	2,00 kV
Rated torque/Screw size	—	0,50 Nm/M3
Contamination degree	—	—

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	CuZn
Clamping cage/Eccentric	—
Contact pin	—
Cage tension spring	—
Wire protection	—
Soldering lug	Cu
Contact Spring	—

No. of poles Cat.-No. Qty.p.pck.

		● green (Ral 6018)	● dark grey (Ral 7016)	
	2	10434.1	10434.4	50
	3	10435.1	10435.4	50
	4	10436.1	10436.4	50
	5	10437.1	10437.4	50
	6	10438.1	10438.4	50
	7	10439.1	10439.4	50
	8	10440.1	10440.4	50
	9	10441.1	10441.4	50
	10	10442.1	10442.4	50
	11	10443.1	10443.4	50
	12	10444.1	10444.4	50
	13	10621.1	10621.4	50
	14	10622.1	10622.4	50
	15	10623.1	10623.4	50
	16	10624.1	10624.4	50
	17	10625.1	10625.4	50
	18	10626.1	10626.4	50
	19	10627.1	10627.4	50
	20	10628.1	10628.4	50
	21	10629.1	10629.4	50
	22	10630.1	10630.4	50
	23	10631.1	10631.4	50
	24	10632.1	10632.4	50

Strain-relief-clamp

Spacing mm	5,08
Insulation stripping length mm	8,00
PCB hole diameter mm	1,30
Single wire (solid) mm ²	4,00
Stranded wire (flexible) mm ²	2,50
Stranded wire (with ferrules) mm ²	2,50

Rated voltage V	300 V	250 V
Rated current A	15 A	24 A (T60)
Cross section max. AWG/mm ²	22-14	2,50
Rated surge voltage	—	2,00 kV
Rated torque/Screw size	—	0,50 Nm/M3
Contamination degree	—	—

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	CuZn
Clamping cage/Eccentric	—
Contact pin	—
Cage tension spring	—
Wire protection	—
Soldering lug	Cu
Contact Spring	—

No. of poles Cat.-No. Qty.p.pck.

		● green (Ral 6018)	● dark grey (Ral 7016)	
	2	10456.1	10456.4	50
	3	10457.1	10457.4	50
	4	10458.1	10458.4	50
	5	10459.1	10459.4	50
	6	10460.1	10460.4	50
	7	10461.1	10461.4	50
	8	10462.1	10462.4	50
	9	10463.1	10463.4	50
	10	10464.1	10464.4	50
	11	10465.1	10465.4	50
	12	10466.1	10466.4	50
	13	12645.1	12645.4	50
	14	12646.1	12646.4	50
	15	12647.1	12647.4	50
	16	12648.1	12648.4	50
	17	12649.1	12649.4	50
	18	12650.1	12650.4	50
	19	12651.1	12651.4	50
	20	12652.1	12652.4	50
	21	12653.1	12653.4	50
	22	12654.1	12654.4	50
	23	12655.1	12655.4	50
	24	12656.1	12656.4	50

Accessories

Marking

Page 126 - 129

Page 126 - 129