



P.C. board plug-in connectors

Connector



PKB 960/... /7,62

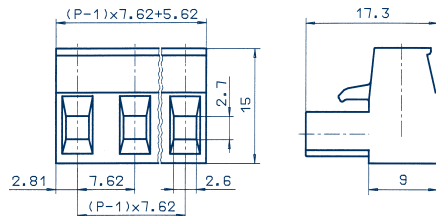

Drawings

Connection principle

Dimensions

Spacing mm	7,62
Insulation stripping length mm	6,00
PCB hole diameter mm	—

Connection data

Single wire (solid) mm ²	2,50
Stranded wire (flexible) mm ²	2,50
Stranded wire (with ferrules) mm ²	2,50

Output information

Rated voltage V	300 V	400 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm ²	28-12	2,50
Rated surge voltage	—	6,00 kV
Rated torque/Screw size	—	0,50 Nm/M3
Contamination degree	—	3

Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	CuZn
Clamping cage/Eccentric	—
Contact pin	—
Cage tension spring	—
Wire protection	—
Soldering lug	—
Contact Spring	CuSn

Order information

Standard colour(s)	No. of poles	Cat.-No.	Qty.p.pck.
(further colours on request, see page 5)		● green (Ral 6018)	
	2	11253.1	50
	3	11254.1	50
	4	11255.1	50
	5	11256.1	50
	6	11257.1	50
	7	11258.1	50
	8	11259.1	50
	9	11260.1	50
	10	11261.1	50
	11	11262.1	50
	12	11263.1	50
	13	11264.1	50
	14	11265.1	50
	15	11266.1	50
	16	11267.1	50

Accessories

Marking	Page 126 - 129
Coding	Page 124 - 125