



P.C. board plug-in connectors

Header




Drawings

STL 960/... /7,62-V-G vertical

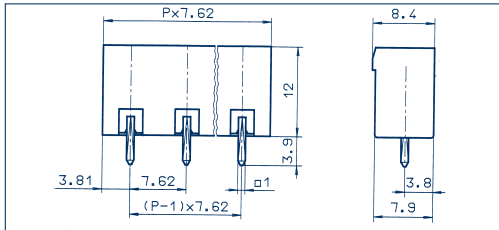

STL 960/... /7,62-H-G horizontal

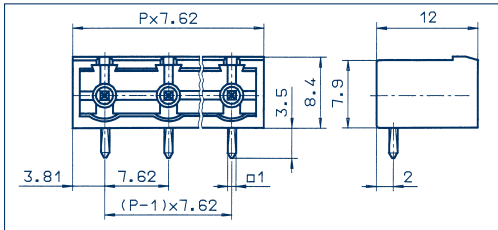

Connection principle

Dimensions

Spacing mm	7,62
Insulation stripping length mm	-
PCB hole diameter mm	1,40

Cross sections

single wire (solid) mm ²	-
stranded wire (flexible) mm ²	-
stranded wire (with ferrules) mm ²	-

Output information

Rated voltage V	300 V	400 V
Rated current A	15 A	12 A (T60)
Cross section max. AWG/mm ²	-	-
Rating impulse voltage	-	6,00 kV
Rated torque/Screw size	-	-
Dirt level	-	3

Materials

Insulating material/Flammability class	PA 6.6 V0 / UL 94 V0
Temperature Range	-30°C / +105°C
Clamping part	-
Clamping cage/Eccentric	-
Contact pin	Cu
Cage tension spring	-
Wire protection	-
Soldering lug	-
Contact Spring	-

Order information

Standard colour(s)
(further colours on request, see page 5)

No. of poles	Cat.-No.	Qty.p.pck.
	● green (Ral 6018)	
2	11729.1	50
3	11730.1	50
4	11731.1	50
5	11732.1	50
6	11733.1	50
7	11734.1	50
8	11735.1	50
9	11736.1	50
10	11737.1	50
11	11738.1	50
12	11739.1	50
13	11740.1	50
14	11741.1	50
15	11742.1	50
16	11743.1	50

No. of poles	Cat.-No.	Qty.p.pck.
	● green (Ral 6018)	
2	11744.1	50
3	11745.1	50
4	11746.1	50
5	11747.1	50
6	11748.1	50
7	11749.1	50
8	11750.1	50
9	11751.1	50
10	11752.1	50
11	11753.1	50
12	11754.1	50
13	11755.1	50
14	11756.1	50
15	11757.1	50
16	11758.1	50

Accessories

Coding Page 124 - 125

Page 124 - 125