
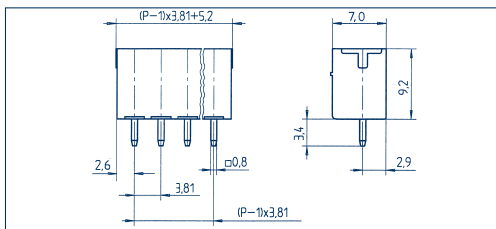
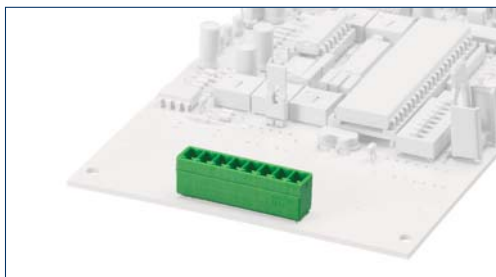
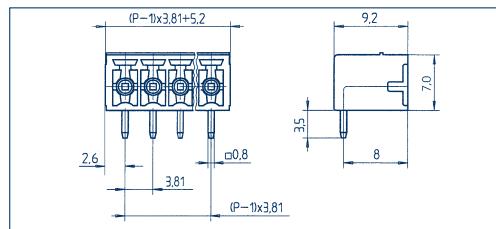
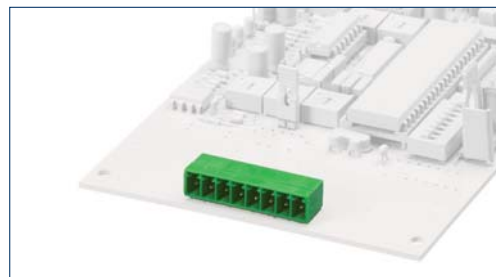


P.C. board plug-in connectors

Header


3,81 mm
Drawings
STL 1550/... /3,81-V-G vertical

STL 1550/... /3,81-H-G horizontal

Connection principle
Dimensions

Spacing mm

3,81

Insulation stripping length mm

—

PCB hole diameter mm

1,20

Connection data

Single wire (solid) mm²

—

Stranded wire (flexible) mm²

—

Stranded wire (with ferrules) mm²

—

Rating

Rated voltage V

300 V

160 V

Rated current A

8 A

9 A (T60)

Cross section max. AWG/mm²

—

Rated surge voltage

4,00 kV

Rated torque/Screw size

—

Contamination degree

—

3

Materials

Insulating material/Flammability class

PA 6.6 V0 / UL 94 V0

Temperature Range

-30°C / +105°C

Clamping part

—

Clamping cage/Eccentric

—

Contact pin

Cu

Cage tension spring

—

Wire protection

—

Soldering lug

—

Contact Spring

—

Order information

Standard colour(s)

● green

(further colours on request, see page 5)

(Ral 6018)

Accessories

Coding

Page 124 - 125

Page 124 - 125