
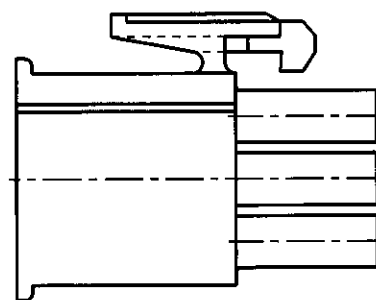
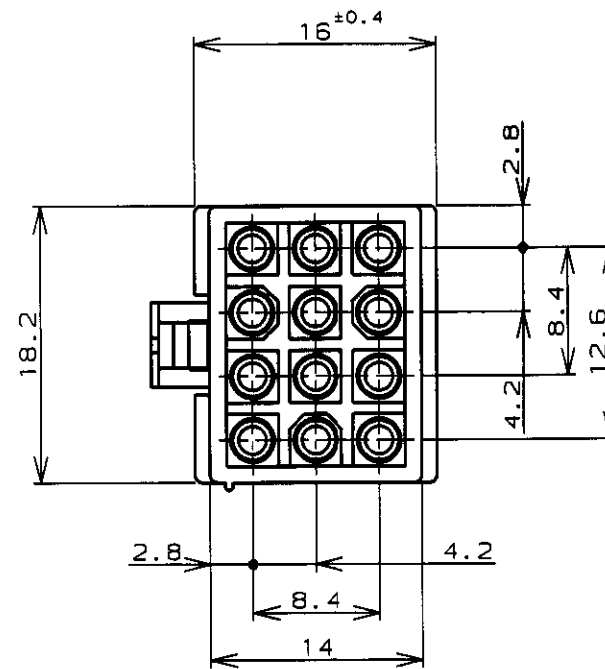
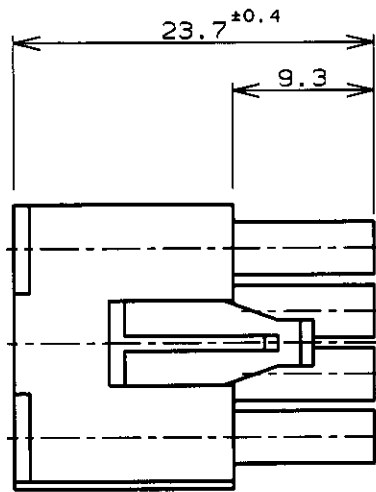


LOC		DIST		REVISIONS				
				変更		DATE	DWN	APVD
P	LTR	DESCRIPTION		DATE	DWN	APVD		
		D2		REVISED PER ECO-11-005140	30MAR11	RK	HMR	

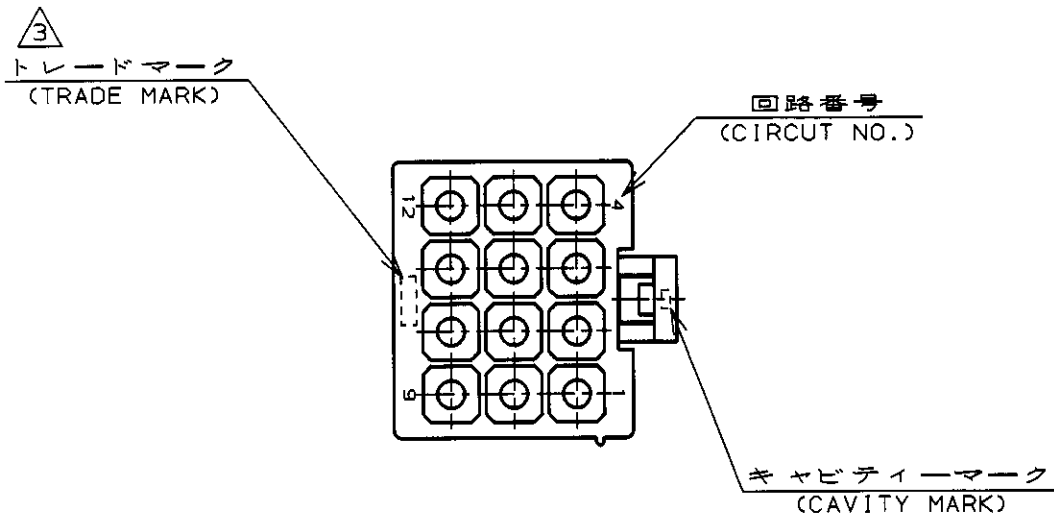

注記;

- 1. 使用端子型番は170359, 170360, 170361, 170362
- 2. 嵌合相手ハウジング型番は172162
- ③ 表1参照

NOTE;

- 1. APPLICABLE CONT P/N: 170359, 170360, 170361, 170362
- 2. MATING HSG P/N: 172162
- ③ SEE TABLE1
- ④ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

表1 (TABLE 1)

トレードマーク (TRADE MARK)	生産場所 (MANUFACTURING PLACE)
-AMP OR AMP	日本 (JAPAN)
+AMP OR AMP	中国 (CHINA(PRC))

④ OBSOLETE

黒 (BLACK)	1-172170-9
青 (BLUE)	1-172170-8
緑 (GREEN)	1-172170-7
赤 (RED)	1-172170-6
自然色 (NATURAL)	172170-1
色 (COLOR)	型番 (P/N)
WIRE RANGE 包含電線断面積	INSULATION DIA 被覆外径

DOWNSIDE		8 JUN '98		N. YAMASAKI	
CHECKED		15 JUN '98		M. SHINDO	
APPROVED		15 JUN '98		M. SHINDO	
PRODUCT SPEC		製品規格		108-5138	
INSTRUCTION SHEET		取り扱い説明書		IS-105J	
MATERIAL		材料		66ナイロン UL94V-0 (66NYLON UL94V-0)	
DIMENSIONS:		単位: 概 mm		TOLERANCES UNLESS OTHERWISE SPECIFIED	
一般公差 (GENERAL TOLERANCE)		±0.3		FINISH	
仕上		---		WEIGHT	
---		---		---	
CUSTOMER DRAWING		SCALE		SHEET	
---		2-1		1 OF 1	
---		DRAWING NO		REV	
---		C=172170		D2	



12極ミニユニバーサルメイトンロックプラグハウジング (UL94V-0)
12Pos MINI UNIVERSAL MATE-N-LOCK CONN.PLUG HOUSING (UL94V-0)

SIZE: A3 CAGE CODE: 00779 DRAWING NO: C=172170 RESTRICTED TO: ---