



Marking Card BK

BK 2,50/2,8

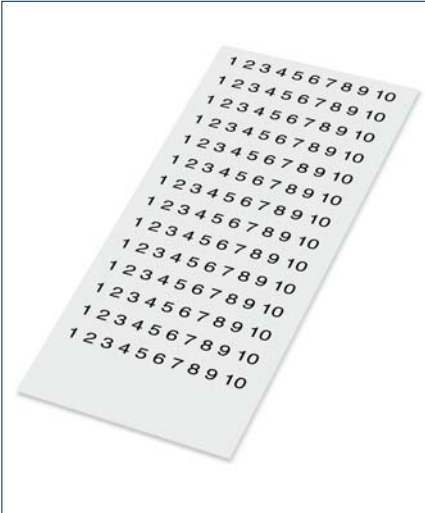

BK 2,54/2,8

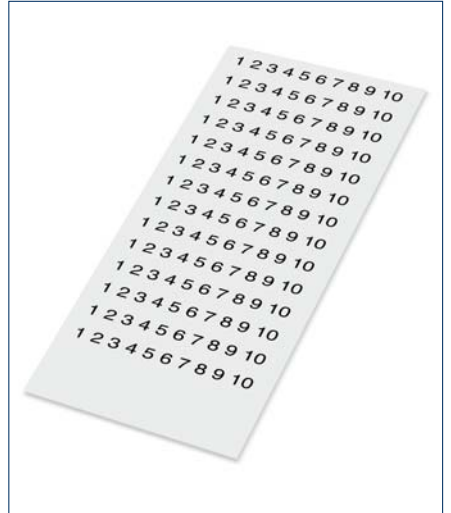

Component parts

Marking Card, non printed, free spacing, including 14 prepunched marking strips.

Card, printed; continuous, horizontal, ten-digit marking strip, 14 marking strips for 140 connectors marked with:

0-9

1-10

11-20

21-30

31-40

Marking pen

Properties

Tabs per marking card

Spacing/Tab height

Material/Color

Temperature range (°C)

Wipe-proof after printing

Type	Cat.-No.	Qty.p.pck.
BK 2,50/2,8	3171.0	10
non printed		
special print	3180.0	10
BK 2,50/2,8 FW 0-9	2979.0	10
BK 2,50/2,8 FW 1-10	2980.0	10
BK 2,50/2,8 FW 11-20	2981.0	10
BK 2,50/2,8 FW 21-30	2982.0	10
BK 2,50/2,8 FW 31-40	2983.0	10
BS-1	2034.0	10

Type	Cat.-No.	Qty.p.pck.
BK 2,54/2,8	3172.0	10
non printed		
special print	3181.0	10
BK 2,54/2,8 FW 0-9	2984.0	10
BK 2,54/2,8 FW 1-10	2985.0	10
BK 2,54/2,8 FW 11-20	2986.0	10
BK 2,54/2,8 FW 21-30	2987.0	10
BK 2,54/2,8 FW 31-40	2988.0	10
BS-1	2034.0	10

140 pcs.

2,50 mm/2,8 mm

Polyester/white

40°C bis +120°C

DIN 30 646; VDE 0611: 1977-11

140 pcs.

2,54 mm/2,8 mm


Polyester/white

-40°C bis +120°C


DIN 30 646; VDE 0611: 1977-11

Marking Card BK

BK 3,50/2,8

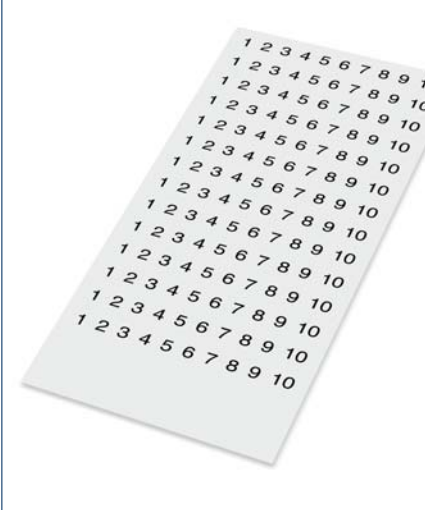

BK 3,81/2,8

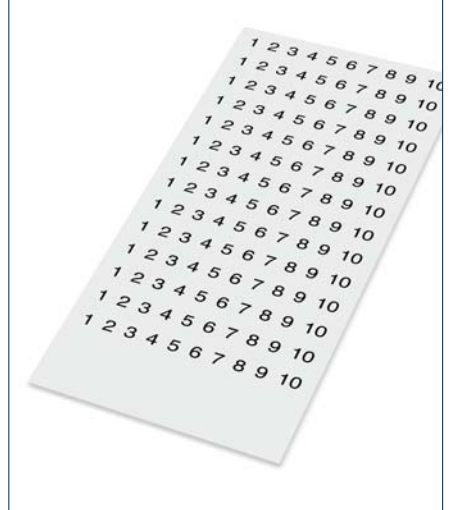

Component parts

Marking card, non printed, free spacing, including 14 prepunched marking strips.

Card, printed; continuous, horizontal, ten-digit marking strip, 14 marking strips for 140/120 connectors marked with:

0-9

1-10

11-20

21-30

31-40

Marking pen

Properties

Tabs per marking card

Spacing/Tab height

Material/Color

Temperature range (°C)

Wipe-proof after printing

Type	Cat.-No.	Qty.p.pck.
BK 3,50/2,8	3173.0	10
non printed		
special print	3182.0	10
BK 3,50/2,8 FW 0-9	3015.0	10
BK 3,50/2,8 FW 1-10	3016.0	10
BK 3,50/2,8 FW 11-20	3017.0	10
BK 3,50/2,8 FW 21-30	3018.0	10
BK 3,50/2,8 FW 31-40	3019.0	10
BS-1	2034.0	10

Type	Cat.-No.	Qty.p.pck.
BK 3,81/2,8	3174.0	10
non printed		
special print	3183.0	10
BK 3,81/2,8 FW 0-9	3032.0	10
BK 3,81/2,8 FW 1-10	3033.0	10
BK 3,81/2,8 FW 11-20	3034.0	10
BK 3,81/2,8 FW 21-30	3035.0	10
BK 3,81/2,8 FW 31-40	3036.0	10
BS-1	2034.0	10

140 pcs.

3,50 mm/2,8 mm

Polyester/white

-40°C bis +120°C

DIN 30 646; VDE 0611: 1977-11

140 pcs.

3,81 mm/2,8 mm

Polyester/white

-40°C bis +120°C

DIN 30 646; VDE 0611: 1977-11