


**Nickel Plated Brass (NPB)**



With Thermoplastic Elastomer (TPE) Sealing Insert



**Cat. No.**

- 21650.6
- 18621.6
- 21651.6
- 18622.6
- 18624.6
- 21653.6
- 21655.6
- 18552.6
- 21656.6
- 21659.6
- 21660.6
- 21661.6
- 21685.6
- 18630.6
- 21662.6
- 21663.6
- 21664.6
- 21665.6
- 21666.6
- 21667.6
- 18635.6
- 21669.6
- 21670.6
- 21672.6
- 18636.6
- 18638.6

**EMI/RFI Locknuts**



Order Separately

**Material**


Nickel Plated Brass (NPB)

**Temperature Range**

-40 to 300°C (-40 to 572°F)

Size	Cat. No.	Std. Pk.
PG9	23011.9	10
PG11	23012.9	10
PG13.5	23013.9	10
PG16	23014.9	10
PG21	23015.9	5
PG29	23016.9	5
PG36	23017.9	5
PG42	23018.9	2
PG48	23019.9	2

See Page 296 for Drawings and Dimensional Information.

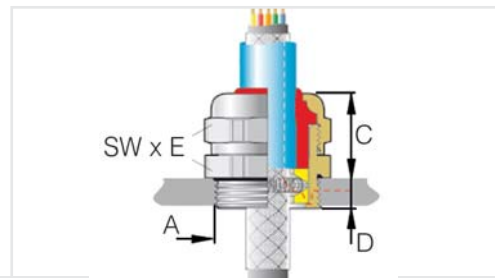

**Cord Grip Dimensions: mm (in.)**

Size	A	C	D	SW	E
PG9	15.2 (.60)	20.0 (.79)	6.0 (.24)	17.0 (.67)	18.9 (.74)
PG11	18.6 (.73)	20.0 (.79)	6.0 (.24)	20.0 (.79)	22.2 (.87)
PG13.5	20.4 (.80)	21.0 (.83)	6.5 (.26)	22.0 (.87)	24.4 (.96)
PG16	22.5 (.89)	21.0 (.83)	6.5 (.26)	24.0 (.94)	26.7 (1.05)
PG21	28.3 (1.11)	25.0 (.98)	7.0 (.28)	30.0 (1.18)	33.5 (1.32)
PG29	37.0 (1.46)	27.0 (1.06)	8.0 (.31)	40.0 (1.57)	43.5 (1.71)
PG36	47.0 (1.85)	28.0 (1.10)	9.0 (.35)	50.0 (1.97)	54.0 (2.24)
PG42	54.0 (2.13)	30.0 (1.18)	10.0 (.39)	57.0 (2.24)	61.0 (2.40)
PG48	59.3 (2.33)	30.0 (1.18)	10.0 (.39)	64.0 (2.52)	69.0 (2.72)