

PIDG RING TONGUE TERMINALS



PIDG

[View on TE.com >](#)

Terminals & Splices > Ring Terminals & Spade Terminals

Pre-Insulated Diamond Grip Ring Tongue Terminals



Barrel Type: **Closed**

Insulation Requirement: **Partially Insulated**

Compatible With Wire Base Material: **Copper**

Compatible With Wire Plating Material: **Tin**

Features

Product Type Features

Terminal Features	Sheared
Shape Description	Circular/Oval, RING-041, RING-042, RING-043, RING-046, RING-059, RING-080, RING-092
Stud Size	#0, #10, #12, #2, #4, #6, #8, 1/2, 1/4, 3/4, 3/8, 5/16, 5/8, M12, M16, M2, M2.5, M3, M3.5, M4, M5, M6, M8
Sealable	No
Wire Insulation Support Retention Type	Insulation Restriction, Insulation Support, Non-Insulation Support

Configuration Features

Number of Holes	1
Terminal Angle (°)	180, 90

Electrical Characteristics

Voltage (Max) (V)	300, 600
-------------------	----------

Body Features

Inspection Slot	No, Yes
Insulation Sleeve Color	Black, Blue, Natural, Red, Yellow
Weight per Piece (g)	.078, .155, .222, .23, .237, .249, .265, .282, .286, .287, .288, .289, .301, .302, .317, .322, .362, .406, .411, .45, .451, .468, .486, .499, .



	53, .532, .539, .581, .588, .6, .611, .622, .625, .637, .65, .658, .66, .662, .676, .7, .703, .705, .715, .722, .739, .747, .767, .769, .775, .781, .782, .787, .789, .796, .805, .806, .818, .821, .826, .828, .83, .839, .84, .842, .843, .846, .847, .85, .851, .852, .856, .869, .87, .872, .876, .877, .881, .894, .904, .917, .919, .938, .939, .945, .95, .956, .964, .967, .985, .986, .99, .996, 1, 1.007, 1.013, 1.014, 1.016, 1.021, 1.026, 1.028, 1.031, 1.039, 1.048, 1.051, 1.075, 1.081, 1.085, 1.087, 1.091, 1.102, 1.114, 1.122, 1.123, 1.156, 1.159, 1.172, 1.213, 1.215, 1.217, 1.228, 1.23, 1.234, 1.235, 1.241, 1.244, 1.25, 1.256, 1.278, 1.305, 1.323, 1.363, 1.376, 1.379, 1.391, 1.392, 1.404, 1.408, 1.413, 1.448, 1.458, 1.459, 1.476, 1.48, 1.485, 1.49, 1.495, 1.503, 1.522, 1.542, 1.545, 1.653, 1.658, 1.702, 1.871, 1.883, 1.919, 1.924, 10, 10.282, 12.088, 2.002, 2.004, 2.118, 2.131, 2.151, 2.192, 2.236, 2.24, 2.247, 2.251, 2.27, 2.284, 2.294, 2.306, 2.314, 2.321, 2.338, 2.358, 2.369, 2.386, 2.393, 2.426, 2.427, 2.429, 2.438, 2.441, 2.442, 2.504, 2.53, 2.544, 2.563, 2.57, 2.571, 2.588, 2.6, 2.601, 2.656, 2.659, 2.691, 2.707, 2.742, 2.752, 2.789, 2.795, 2.819, 2.826, 2.827, 2.838, 2.869, 3, 3.018, 3.028, 3.087, 3.15, 3.166, 3.172, 3.186, 3.244, 3.249, 3.266, 3.345, 3.415, 3.472, 3.485, 3.558, 3.648, 3.741, 3.75, 3.797, 3.95, 3.98, 4.32, 4.462, 4.514, 4.889, 4.947, 5.307, 5.547, 5.962, 7.09, 9.972
--	--

Stripe Color	Black, Blue, Brown, Green, Red, White, Yellow
--------------	---

Contact Features

Military Part Class	Class I, Class II
Contact Base Material	Copper
Ring & Spade Terminal Type	Hook Tongue, Multiple Stud, Ring Tongue
Barrel Type	Closed
Terminal Orientation	Offset, Straight
Terminal Plating Material	Tin, Tin-Lead

Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

Dimensions

Wire Size (AWG)	10, 12, 12 - 10, 14, 16, 16 - 14, 18, 20, 22, 22 - 16, 24, 24 - 20, 26, 26 - 22, 26 - 24
-----------------	--



Wire Size (mm ²)	.1 - .4, .1 - .41, .12 - .15, .12 - .24, .12 - .32, .12 - .4, .129 - .326, .2 - .24, .2 - .517, .2 - .518, .205 - .4, .205 - .518, .25 - 1.6, .26 - 1.42, .26 - 1.65, .3 - .4, .3 - 1.3, .3 - 1.42, .3 - 1.65, .326 - 1.31, .5 - .6, .6, .8 - .9, .9 - .96, 1.04 - 2, 1.04 - 2.62, 1.04 - 2.64, 1.25 - 1.4, 1.25 - 2, 1.3 - 2, 1.31 - 2.08, 2 - 2.15, 2.26 - 6.64, 2.62 - 6.64, 2.7 - 6.6, 3 - 6, 3.3, 3.3 - 5.3, 3.31, 3.31 - 5.26, 5 - 6
Wire Size (CMA)	202 - 509, 202 - 810, 238 - 475, 304, 320 - 1290, 475, 509 - 3260, 754, 1186, 1900, 2050 - 5180, 2800, 4234, 5180 - 13100, 6654, 12066
Stud Diameter (mm)	2.18, 2.36, 2.84, 3.02, 3.25, 3.51, 3.68, 4.17, 4.34, 4.82, 4.83, 5, 5.2, 5.25, 5.26, 5.66, 6.3, 6.35, 6.73, 7.92, 8.3, 8.33, 9.53, 9.91, 12.7, 13.02, 13.08, 16.66, 19.05
Stud Diameter (in)	.086, .093, .112, .119, .128, .138, .145, .164, .171, .19, .191, .197, .205, .207, .223, .248, .25, .265, .312, .327, .328, .375, .39, .5, .515, .656, .75
Tongue Thickness (mm)	.46, .5, .68, .69, .74, .77, .78, .79, .84, .99, 1, 1.02, 1.07, 1.22, 1.27
Tongue Thickness (in)	.018, .02, .027, .029, .031, .033, .039, .04, .042, .048, .05
Overall Product Length (mm)	1.3, 13.33, 13.36, 14.96, 15.6, 15.67, 16.41, 16.97, 16.99, 17.07, 17.4, 17.86, 17.9, 18.6, 18.64, 18.7, 18.77, 18.8, 18.9, 18.92, 19.4, 19.43, 19.86, 20.1, 20.24, 20.65, 20.67, 20.7, 20.85, 21.2, 21.44, 21.62, 21.8, 21.82, 21.92, 21.94, 22.25, 23, 23.01, 24.2, 24.21, 24.31, 26.19, 26.54, 26.57, 26.6, 26.72, 27.38, 27.4, 27.5, 27.51, 27.68, 28.39, 28.83, 28.96, 29, 29.16, 29.2, 29.59, 29.74, 29.77, 30.18, 30.2, 30.94, 32.5, 32.51, 32.84, 32.9, 32.92, 33.58, 33.6, 33.83, 34.4, 35.18, 35.36, 35.58, 35.9, 35.91, 35.92, 35.96, 35.97, 36, 36.4, 37.74, 37.85, 38.35, 38.38, 40.48, 40.49, 55.36, 56.36, 56.4, 58.62
Overall Product Length (in)	.051, .525, .526, .589, .615, .617, .646, .668, .669, .67, .672, .685, .703, .731, .734, .736, .739, .74, .744, .745, .765, .782, .792, .797, .8, .813, .814, .821, .833, .84, .844, .851, .859, .86, .863, .864, .876, .906, .91, .95, .953, .957, 1.03, 1.045, 1.046, 1.05, 1.052, 1.076, 1.078, 1.08, 1.083, 1.09, 1.12, 1.14, 1.148, 1.151, 1.165, 1.17, 1.171, 1.188, 1.19, 1.218, 1.28, 1.292, 1.293, 1.296, 1.3, 1.32, 1.322, 1.33,

	1.355, 1.39, 1.392, 1.41, 1.414, 1.42, 1.432, 1.486, 1.49, 1.51, 1.59, 1.594, 2.18, 2.219, 2.22, 2.31
Accepts Wire Insulation Diameter (Max) (mm)	1.4, 2.03, 2.08, 2.54, 2.67, 2.79, 3.18, 3.3, 3.56, 3.81, 4.32, 5.08, 5.59, 5.84, 6.35, 6.4, 7.62
Accepts Wire Insulation Diameter (Max) (in)	.055, .08, .082, .1, .105, .11, .125, .13, .14, .15, .17, .2, .22, .23, .25, .252, .3
Accepts Wire Insulation Diameter Range (mm)	.66 - 1.4, .79 - 1.4, .81 - 2.08, .97 - 2.79, 1.02 - 2.54, 1.17 - 2.79, 1.27 - 2.03, 1.27 - 2.08, 1.27 - 2.67, 1.42 - 2.79, 1.6 - 3.3, 1.98 - 3.3, 2.03 - 3.18, 2.03 - 3.81, 2.41 - 5.08, 2.67 - 3.56, 2.67 - 3.81, 2.68 - 3.81, 2.92 - 4.31, 3.02 - 5.08, 3.8 - 6.4, 3.81 - 5.59, 3.81 - 5.84, 3.81 - 6.35, 4.32 - 7.62
Accepts Wire Insulation Diameter Range (in)	.026 - .055, .031 - .055, .032 - .082, .038 - .11, .04 - .1, .046 - .11, .05 - .08, .05 - .082, .05 - .105, .056 - .11, .063 - .13, .078 - .13, .08 - .125, .08 - .15, .095 - .2, .105 - .14, .105 - .15, .106 - .15, .115 - .17, .119 - .2, .15 - .22, .15 - .23, .15 - .25, .15 - .252, .17 - .3

Usage Conditions

Insulation Requirement	Partially Insulated
Operating Temperature Range (°C)	-40 - 105, 105, 150, 170, 288
Operating Temperature Range (°F)	-40 - 221, 221, 302, 338, 550

Operation/Application

Compatible With Wire Base Material	Copper
Compatible With Wire Plating Material	Tin
Heavy Duty	No, Yes

Industry Standards

Government Qualified	No, Yes
----------------------	---------

Packaging Features

Packaging Quantity	1, 100, 1000, 1500, 15000, 2000, 2500, 3500, 4000, 50, 500, 5000, 50000
Packaging Method	Box, Box & Carton, Loose Piece, Package, Reel, Tape & Reel, Tape Mounted

Other

Comment	Available On-Tape for Automatic Termination., Heavy Duty for extra mechanical strength, Marking: Commercial
---------	---



22-16- Military 22-18 in accordance with MIL-T-7928., Must be crimped with a 22-18 or 22-16 PIDG (red) tool., Oversize expansions provided in insulation only., Slightly larger than standard #4 stud hole. (.128in./3.25mm.), This is not a military qualified part.

Reference Number

TE Internal Number	CAT-P592-R472A
--------------------	----------------

SEE PRODUCTS ON NEXT PAGE



Products (1 of 5)



TERMINAL,PIDG R IR 16 1/4

TERMINAL,PIDG R 16-14 10

TERMINAL,PIDG R 16-14 1/2

TERMINAL,PIDG R 26-22 10

TE Part #	2-320563-3	324533	328849	324075
Ring & Spade Terminal Type	Ring Tongue	Ring Tongue	Ring Tongue	Ring Tongue
Wire Size	16 AWG	16 - 14 AWG	16 - 14 AWG	26 - 22 AWG
Stud Size	1/4, M6	#10	1/2, M12	#10
Stud Diameter	6.35 mm	5 mm	13.08 mm	5 mm
Tongue Thickness	.79 mm	.79 mm	.79 mm	.79 mm
Terminal Orientation	Offset	Straight	Straight	Straight
Overall Product Length	28.96 mm	27.38 mm	32.84 mm	18.8 mm
Terminal Angle	180 °	180 °	180 °	180 °
Sealable	No	No	No	No
Terminal Plating Material	Tin	Tin	Tin	Tin
Operating Temperature Range	105 °C	105 °C	105 °C	105 °C
Wire Insulation Support Retention Type	Insulation Restriction	Insulation Support	Insulation Support	Insulation Support
Accepts Wire Insulation Diameter (Max)	3.3 mm	4.32 mm	4.32 mm	2.08 mm
Accepts Wire Insulation Diameter Range	1.6 - 3.3 mm	2.92 - 4.31 mm	2.92 - 4.31 mm	1.27 - 2.08 mm
Heavy Duty	No	No	No	No
Packaging Method	Loose Piece	Loose Piece	Loose Piece	Loose Piece
EU RoHS Directive 2011/65 /EU	EU RoHS Compliant	EU RoHS Compliant	EU RoHS Compliant	EU RoHS Compliant
EU ELV Directive 2000/53/EC	EU ELV Compliant	EU ELV Compliant	EU ELV Compliant	EU ELV Compliant
Series	PIDG	PIDG	PIDG	PIDG

***EU RoHS Directive 2011/65/EU**

These products comply with the substance restrictions of the Restriction on Hazardous Substances Directive 2011/65/EU (RoHS2). The RoHS2 Directive requires that certain electrical and electronic equipment products do not contain mercury, cadmium, hexavalent chromium, PBB, PBDE, lead, DEHP, BBP, DBP and DIBP above defined thresholds. Products indicated as 'Compliant' do not contain any of these substances above the prohibition thresholds. Finished electrical and electronic equipment products will be CE marked as required by the Directive. Components may not be CE marked.

****EU ELV Directive 2000/53/EC**

These products comply with the substance restrictions of the End of Life Vehicles Directive 2000/53/EC (ELV). The ELV Directive requires that materials and components of vehicles do not contain mercury, cadmium, hexavalent chromium, and lead above defined thresholds. Products indicated as 'Compliant' do not contain any of these substances above the prohibition thresholds.



Products (2 of 5)



PIDG R 22-16 COMM 22-18 MIL 6

PIDG R 22-16 COMM 22-18 MIL 1/2

TERMINAL, PIDG R 16-14 5/16

TERMINAL, PIDG R 16-14 3/8

TE Part #	8-36150-1	328975	320575	320564
Ring & Spade Terminal Type	Ring Tongue	Ring Tongue	Ring Tongue	Ring Tongue
Wire Size	22 - 16 AWG	22 - 16 AWG	16 - 14 AWG	16 - 14 AWG
Stud Size	#6, M3.5	M12	5/16, M8	3/8
Stud Diameter	3.68 mm	13.08 mm	7.92 mm	9.53 mm
Tongue Thickness	.79 mm	.79 mm	.79 mm	.79 mm
Terminal Orientation	Straight	Straight	Straight	Straight
Overall Product Length	17.07 mm	32.84 mm	27.4 mm	32.5 mm
Terminal Angle	180 °	180 °	180 °	180 °
Sealable	No	No	No	No
Terminal Plating Material	Tin	Tin	Tin	Tin
Operating Temperature Range	105 °C	105 °C	105 °C	105 °C
Wire Insulation Support Retention Type	Insulation Support	Insulation Support	Non-Insulation Support	Non-Insulation Support
Accepts Wire Insulation Diameter (Max)	3.56 mm	3.18 mm	3.81 mm	3.81 mm
Accepts Wire Insulation Diameter Range	2.67 - 3.56 mm	2.03 - 3.18 mm	2.67 - 3.81 mm	2.67 - 3.81 mm
Heavy Duty	No	No	No	No
Packaging Method	Loose Piece	Loose Piece	Box	Loose Piece
EU RoHS Directive 2011/65 /EU	EU RoHS Compliant	EU RoHS Compliant	EU RoHS Compliant	EU RoHS Compliant
EU ELV Directive 2000/53/EC	EU ELV Compliant	EU ELV Compliant	EU ELV Compliant	EU ELV Compliant
Series	PIDG	PIDG	PIDG	PIDG

***EU RoHS Directive 2011/65/EU**

These products comply with the substance restrictions of the Restriction on Hazardous Substances Directive 2011/65/EU (RoHS2). The RoHS2 Directive requires that certain electrical and electronic equipment products do not contain mercury, cadmium, hexavalent chromium, PBB, PBDE, lead, DEHP, BBP, DBP and DIBP above defined thresholds. Products indicated as 'Compliant' do not contain any of these substances above the prohibition thresholds. Finished electrical and electronic equipment products will be CE marked as required by the Directive. Components may not be CE marked.

****EU ELV Directive 2000/53/EC**

These products comply with the substance restrictions of the End of Life Vehicles Directive 2000/53/EC (ELV). The ELV Directive requires that materials and components of vehicles do not contain mercury, cadmium, hexavalent chromium, and lead above defined thresholds. Products indicated as 'Compliant' do not contain any of these substances above the prohibition thresholds.



Products (3 of 5)



TERMINAL,PIDG R 16-14HD
3/8

PIDG R 22-16COMM 22-
18MIL 3/8

TERMINAL,PIDG R 12-10 6

TERMINAL,PIDG R 16-14HD
1/2

TE Part #	330896	320573	320634	35316
Ring & Spade Terminal Type	Ring Tongue	Ring Tongue	Ring Tongue	Ring Tongue
Wire Size	16 - 14 AWG	22 - 16 AWG	12 - 10 AWG	16 - 14 AWG
Stud Size	3/8	3/8	#6, M3.5	1/2, M12
Stud Diameter	9.91 mm	9.53 mm, 9.91 mm	3.68 mm	13.02 mm
Tongue Thickness	.79 mm	.79 mm	.79 mm	1.22 mm
Terminal Orientation	Straight	Straight	Straight	Straight
Overall Product Length	32.9 mm	30.94 mm	24.21 mm	40.48 mm
Terminal Angle	180 °	180 °	180 °	180 °
Sealable	No	No	No	No
Terminal Plating Material	Tin	Tin	Tin	Tin
Operating Temperature Range	105 °C	105 °C	105 °C	105 °C
Wire Insulation Support Retention Type	Insulation Support	Non-Insulation Support	Non-Insulation Support	Insulation Support
Accepts Wire Insulation Diameter (Max)	5.84 mm	3.18 mm	5.84 mm	6.35 mm
Accepts Wire Insulation Diameter Range	3.81 - 5.84 mm	2.03 - 3.18 mm	3.81 - 5.84 mm	3.81 - 6.35 mm
Heavy Duty	Yes	No	No	Yes
Packaging Method	Loose Piece	Loose Piece	Loose Piece	Loose Piece
EU RoHS Directive 2011/65 /EU	EU RoHS Compliant	EU RoHS Compliant	EU RoHS Compliant	EU RoHS Compliant
EU ELV Directive 2000/53/EC	EU ELV Compliant	EU ELV Compliant	EU ELV Compliant	EU ELV Compliant
Series	PIDG	PIDG	PIDG	PIDG

***EU RoHS Directive 2011/65/EU**

These products comply with the substance restrictions of the Restriction on Hazardous Substances Directive 2011/65/EU (RoHS2). The RoHS2 Directive requires that certain electrical and electronic equipment products do not contain mercury, cadmium, hexavalent chromium, PBB, PBDE, lead, DEHP, BBP, DBP and DIBP above defined thresholds. Products indicated as 'Compliant' do not contain any of these substances above the prohibition thresholds. Finished electrical and electronic equipment products will be CE marked as required by the Directive. Components may not be CE marked.

****EU ELV Directive 2000/53/EC**

These products comply with the substance restrictions of the End of Life Vehicles Directive 2000/53/EC (ELV). The ELV Directive requires that materials and components of vehicles do not contain mercury, cadmium, hexavalent chromium, and lead above defined thresholds. Products indicated as 'Compliant' do not contain any of these substances above the prohibition thresholds.



Products (4 of 5)



TERMINAL,PIDG R IR 22 1/4



TERMINAL,PIDG R 16-14HD 6



TERMINAL,PIDG R 26-22 8



PIDG R 22-16 COMM 22-18 MIL 10

TE Part #	2-320571-3	35634	323916	32836
Ring & Spade Terminal Type	Ring Tongue	Ring Tongue	Ring Tongue	Ring Tongue
Wire Size	22 AWG	16 - 14 AWG	26 - 22 AWG	22 AWG
Stud Size	1/4, M6	#6, M3.5	#8, M4	#10
Stud Diameter	6.35 mm	3.68 mm	4.34 mm	5 mm
Tongue Thickness	.79 mm	1.27 mm	.79 mm	.79 mm
Terminal Orientation	Offset	Straight	Straight	Straight
Overall Product Length	27.38 mm	24.21 mm	18.8 mm	22.25 mm
Terminal Angle	180 °	180 °	180 °	180 °
Sealable	No	No	No	No
Terminal Plating Material	Tin	Tin	Tin	Tin
Operating Temperature Range	105 °C	105 °C	105 °C	105 °C
Wire Insulation Support Retention Type	Insulation Restriction	Insulation Support	Insulation Support	Insulation Support
Accepts Wire Insulation Diameter (Max)	2.79 mm	6.35 mm	2.08 mm	3.18 mm
Accepts Wire Insulation Diameter Range	.97 - 2.79 mm	3.81 - 6.35 mm	1.27 - 2.08 mm	2.03 - 3.18 mm
Heavy Duty	No	Yes	No	No
Packaging Method	Loose Piece	Loose Piece	Loose Piece	Loose Piece
EU RoHS Directive 2011/65 /EU	EU RoHS Compliant	EU RoHS Compliant	EU RoHS Compliant	EU RoHS Compliant
EU ELV Directive 2000/53/EC	EU ELV Compliant	EU ELV Compliant	EU ELV Compliant	EU ELV Compliant
Series	PIDG	PIDG	PIDG	PIDG

***EU RoHS Directive 2011/65/EU**

These products comply with the substance restrictions of the Restriction on Hazardous Substances Directive 2011/65/EU (RoHS2). The RoHS2 Directive requires that certain electrical and electronic equipment products do not contain mercury, cadmium, hexavalent chromium, PBB, PBDE, lead, DEHP, BBP, DBP and DIBP above defined thresholds. Products indicated as 'Compliant' do not contain any of these substances above the prohibition thresholds. Finished electrical and electronic equipment products will be CE marked as required by the Directive. Components may not be CE marked.

****EU ELV Directive 2000/53/EC**

These products comply with the substance restrictions of the End of Life Vehicles Directive 2000/53/EC (ELV). The ELV Directive requires that materials and components of vehicles do not contain mercury, cadmium, hexavalent chromium, and lead above defined thresholds. Products indicated as 'Compliant' do not contain any of these substances above the prohibition thresholds.

Products (5 of 5)



TERMINAL,PIDG R 26-22 2

TERMINAL,PIDG R 16-14HD
1/2

TERMINAL,PIDG R 12-10 10

TERMINAL,PIDG R 16-14 6

TE Part #	329951	36203	32883	326882
Ring & Spade Terminal Type	Ring Tongue	Ring Tongue	Ring Tongue	Ring Tongue
Wire Size	26 - 22 AWG	16 - 14 AWG	12 - 10 AWG	16 - 14 AWG
Stud Size	#2	1/2	#10	#6, M3.5
Stud Diameter	2.36 mm	13.08 mm	5 mm	3.68 mm
Tongue Thickness	.79 mm	1.22 mm	1.02 mm	.79 mm
Terminal Orientation	Straight	Straight	Straight	Straight
Overall Product Length	15.6 mm	56.36 mm	26.54 mm	20.65 mm
Terminal Angle	180 °	180 °	180 °	180 °
Sealable	No	No	No	No
Terminal Plating Material	Tin	Tin	Tin	Tin
Operating Temperature Range	105 °C	105 °C	105 °C	105 °C
Wire Insulation Support Retention Type	Insulation Support	Insulation Support	Insulation Support	Insulation Support
Accepts Wire Insulation Diameter (Max)	2.03 mm	6.35 mm	5.84 mm	4.32 mm
Accepts Wire Insulation Diameter Range	1.27 - 2.03 mm	3.81 - 6.35 mm	3.81 - 5.84 mm	2.92 - 4.31 mm
Heavy Duty	No	Yes	No	No
Packaging Method	Loose Piece	Loose Piece	Loose Piece	Loose Piece
EU RoHS Directive 2011/65 /EU	EU RoHS Compliant	EU RoHS Compliant	EU RoHS Compliant	EU RoHS Compliant
EU ELV Directive 2000/53/EC	EU ELV Compliant	EU ELV Compliant	EU ELV Compliant	EU ELV Compliant
Series	PIDG	PIDG	PIDG	PIDG

***EU RoHS Directive 2011/65/EU**

These products comply with the substance restrictions of the Restriction on Hazardous Substances Directive 2011/65/EU (RoHS2). The RoHS2 Directive requires that certain electrical and electronic equipment products do not contain mercury, cadmium, hexavalent chromium, PBB, PBDE, lead, DEHP, BBP, DBP and DIBP above defined thresholds. Products indicated as 'Compliant' do not contain any of these substances above the prohibition thresholds. Finished electrical and electronic equipment products will be CE marked as required by the Directive. Components may not be CE marked.

****EU ELV Directive 2000/53/EC**

These products comply with the substance restrictions of the End of Life Vehicles Directive 2000/53/EC (ELV). The ELV Directive requires that materials and components of vehicles do not contain mercury, cadmium, hexavalent chromium, and lead above defined thresholds. Products indicated as 'Compliant' do not contain any of these substances above the prohibition thresholds.

Related Materials

[Data Sheet](#)

[PIDG TERMINALS & SPLICES Quick Reference Guide](#)

English

[Data Sheet](#)


[Standard Terminals & Splices](#)

English

Also in the Series | PIDG



Compression Connectors(17)

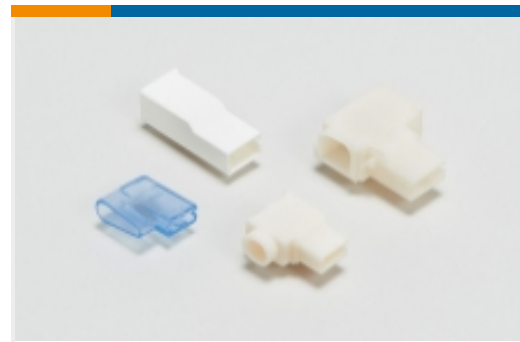

Crimp Terminal Housings(1)



Crimp Wire Pins, Tabs & Ferrules(41)



Knife Disconnects(11)



PCB Terminals(9)




Portable Crimp Tools(2)



Quick Disconnects(53)



Ring Terminals & Spade Terminals(862)

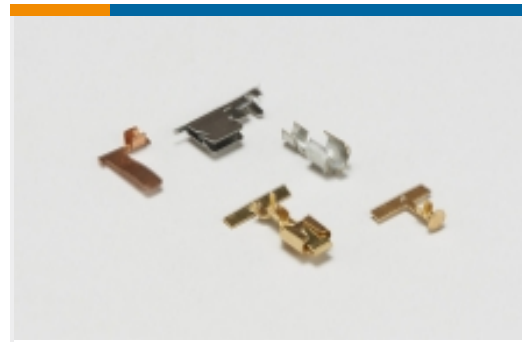

Special Purpose Terminals(1)



Splices(48)