

Fork terminals and Pin terminals

Non-insulated locking fork terminals & pin terminals




Non-insulated locking fork terminals



Cat. no.	Pkg. qty.	Wire range (AWG)	Bolt hole (in.)	Rec. tool	Dimensions (in.)				Stock thick. (in.)
					A	B	C	M	
A18-6FL	100	22-16	#6	ERG4002	0.75	0.25	0.27	0.59	0.02
A221	1,000	22-16	#6		0.75	0.25	0.27	0.59	
A18-8FL	100	22-16	#8		0.75	0.29	0.27	0.59	
A224	1,000	22-16	#8		0.75	0.29	0.27	0.59	
A18-10FL	100	22-16	#10		0.75	0.29	0.27	0.59	
A225	1,000	22-16	#10		0.75	0.29	0.27	0.59	0.03
B14-6FL	100	18-14	#6	ERG4002	0.75	0.25	0.27	0.59	
B220	1,000	18-14	#6	ERG4005	0.75	0.25	0.27	0.59	
B14-8FL	100	18-14	#8		0.75	0.29	0.27	0.59	
B223	1,000	18-14	#8		0.75	0.29	0.27	0.59	
B14-10FL	100	18-14	#10		0.75	0.29	0.27	0.59	0.04
B225	1,000	18-14	#10		0.75	0.29	0.27	0.59	
C10-6FL	50	12-10	#6		0.85	0.31	0.27	0.66	
C220-TB	500	12-10	#6		0.85	0.31	0.27	0.66	
C10-8FL	50	12-10	#8		0.85	0.37	0.27	0.66	
C221	500	12-10	#8		0.85	0.37	0.27	0.66	0.04
C10-10FL	50	12-10	#10		0.85	0.37	0.27	0.66	
C222	500	12-10	#10		0.85	0.37	0.27	0.66	
C10-14FL	50	12-10	¼		0.85	0.49	0.27	0.66	

Diagram

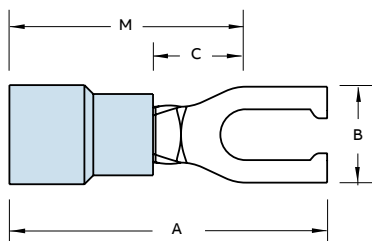

Pin terminals



Cat. no.	Pkg. qty.	Wire range (AWG)	Dimensions (in.)		Rec. tools	Stock thick. (in.)
			D (Dia.)	L		
Non-insulated						
A47PT	1,000	22-18	0.075	0.63	ERG4002	0.02
B47PT	1,000	16-14	0.075	0.63		0.03
C55PT	500	12-10	0.106	0.76		0.04
Vinyl						
18RA-47PT	100	22-18	0.075	0.85	ERG4001	0.02
RA47PT	1,000	22-18	0.075	0.85		0.03
14RB-47PT	100	16-14	0.075	0.87		0.04
RB47PT	1,000	16-14	0.075	0.87		0.04
10RC-55PT	50	12-10	0.106	1.04		0.04
RC55PT	500	12-10	0.106	1.04		0.04
Nylon						
RA18-47PT	100	22-18	0.075	0.85	ERG4001	0.02
RA147PT	1,000	22-18	0.075	0.85		0.03
RB14-47PT	100	16-14	0.075	0.87		0.04
RB147PT	1,000	16-14	0.075	0.87		0.04
RC10-55PT	50	12-10	0.106	1.04		0.04
RC155PT	500	12-10	0.106	1.04		0.04

Diagrams

