

## Ring terminals

Nylon-insulated rectangular rings & non-insulated rectangular rings




Nylon-insulated rectangular rings



Cat. no.	Pkg. qty.	Wire range hole (AWG)	Rec. tool	Dimensions (in.)				Bu-ships tongue shape	Stock thick. (in.)
				A	B	C	M		
RA486	1,000	#4 22-18	ERG4001	0.796	0.237	0.237	0.143	L86P-1	0.03
RA485	1,000	#4 22-18		1.015	0.237	0.404	0.195	L85P-1	
RA483	1,000	#5 22-18		0.859	0.277	0.277	0.143	L83P-1	
RA484	1,000	#6 22-18		1.015	0.237	0.404	0.195	L84P-1	
RA481	1,000	#6 22-18		1.109	0.302	0.465	0.227	L81P-1	
RA482	1,000	#8 22-18		1.109	0.302	0.465	0.227	L82P-1	
RA480*	1,000	#8 22-18		1.359	0.390	0.621	0.310	L80P-1	
RB486	1,000	#4 16-14		0.796	0.237	0.237	0.143	L86P-2	0.03
RB485	1,000	#4 16-14		1.015	0.237	0.404	0.195	L85P-2	
RB483	1,000	#5 16-14		0.859	0.277	0.277	0.143	L83P-2	
RB484	1,000	#6 16-14		1.015	0.237	0.404	0.195	L84P-2	
RB481	1,000	#6 16-14		1.109	0.302	0.465	0.227	L81P-2	
RB482	1,000	#8 16-14		1.109	0.302	0.465	0.227	L82P-2	
RB480*	1,000	#8 16-14		1.359	0.390	0.621	0.310	L80P-2	
RC486	500	#4 12-10		0.984	0.237	0.237	0.143	L86P-3	0.04
RC485	500	#4 12-10		1.187	0.237	0.404	0.195	L85P-3	
RC483	500	#5 12-10		1.046	0.277	0.277	0.143	L83P-3	
RC484	500	#6 12-10		1.203	0.237	0.404	0.195	L84P-3	
RC481	500	#6 12-10		1.281	0.302	0.465	0.227	L81P-3	
RC482	500	#8 12-10		1.281	0.302	0.465	0.227	L82P-3	
RC480*	500	#8 12-10		1.531	0.390	0.621	0.310	L80P-3	

Diagram




\* Not available on tape.

Note: RA, RB, RC486 for use with BU-Ships terminal board types 26TB. RA, RB, RC485 for use with 25TB and 27TB. RA, RB, RC483 for use with 8TB. RA, RB, RC484 for use with 10TB and 11TB. RA, RB, RC481 for use with 6TB, 7TB and 9TB. RA, RB, RC482 for use with 15TB. RA, RB, RC480 for use with 3TB, 4TB, 5TB, 16TB, 17TB and 18TB.

Note:

22-18 ga. = 1-2 Navy  
16-14 ga. = 2½-4 Navy  
12-10 ga. = 6-9 Navy

### The heavy-duty terminal solution!

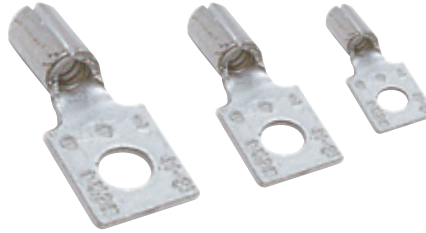


Non-insulated rectangular rings



Cat. no.	Pkg. qty.	Wire range hole (AWG)	Rec. tool	Dimensions (in.)				Bu-ships tongue shape	Stock thick. (in.)
				A	B	C	M		
A486	1,000	#4 22-18	ERG4002	0.65	0.237	0.237	0.143	L86	0.03
A485	1,000	#4 22-18		0.87	0.237	0.404	0.195	L85	
A483	1,000	#5 22-18		0.70	0.277	0.277	0.143	L83	
A484	1,000	#6 22-18		0.87	0.237	0.404	0.195	L84	
A481	1,000	#6 22-18		0.96	0.302	0.465	0.227	L81	
A482	1,000	#8 22-18		0.96	0.302	0.465	0.227	L82	
A480*	1,000	#8 22-18		1.21	0.390	0.621	0.310	L80	
B486	1,000	#4 16-14	ERG4002	0.65	0.237	0.237	0.143	L86	0.03
B485	1,000	#4 16-14	ERG4005	0.87	0.237	0.404	0.195	L85	
B483	1,000	#5 16-14		0.70	0.277	0.277	0.143	L83	
B484	1,000	#6 16-14		0.87	0.237	0.404	0.195	L84	
B481	1,000	#6 16-14		0.96	0.302	0.465	0.227	L81	
B482	1,000	#8 16-14		0.96	0.302	0.465	0.227	L82	
B480*	1,000	#8 16-14		1.21	0.390	0.621	0.310	L80	
C486	500	#4 12-10		0.73	0.237	0.237	0.143	L86	0.04
C485	500	#4 12-10		0.90	0.237	0.404	0.195	L85	
C483	500	#5 12-10		0.76	0.277	0.277	0.143	L83	
C484	500	#6 12-10		0.94	0.237	0.404	0.195	L84	
C481	500	#6 12-10		1.03	0.302	0.465	0.227	L81	
C482	500	#8 12-10		1.03	0.302	0.465	0.227	L82	
C480*	500	#8 12-10		1.27	0.390	0.621	0.310	L80	

Diagram

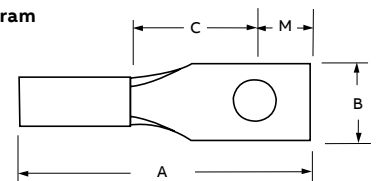

\* Not available on tape.

Note: A, B, C486 for use with BU-Ships terminal board types 26TB. A, B, C485 for use with 25TB, 27TB. A, B, C483 for use with 8TB. A, B, C484 for use with 10TB and 11TB. A, B, C481 for use with 6TB, 7TB and 9TB. A, B, C482 for use with 15TB. A, B, C480 for use with 3TB, 5TB, 16TB, 17TB and 18TB.

Note:

22-18 ga. = 1-2 Navy  
16-14 ga. = 2½-4 Navy  
12-10 ga. = 6-9 Navy