


Coating Color: Light Green

Small Series: Blue

Marking: Color Code

POWER DERATING CURVE

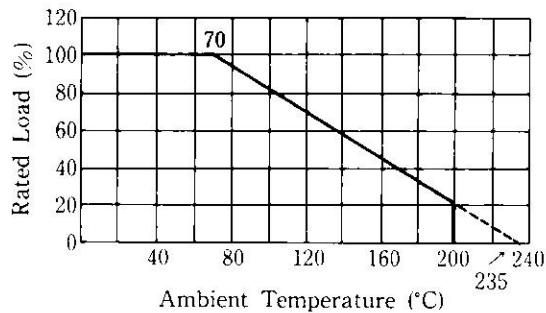

DIMENSION

ASJ#	Dimension in/mm			
	L	D	d	l
MO1B	0.433±0.39 11±1	0.157±0.019 4±0.5	0.03±0.002 0.8±0.05	1.18±0.12 30±3
MO2B	0.59±0.039 15±1	0.236±0.039 6±1	0.03±0.002 0.8±0.05	1.5±0.12 38±3
MO3B	0.964±0.039 24.5±1	0.354±0.039 9±1	0.03±0.002 0.8±0.05	1.5±0.12 38±3

ASJ#	Dimension in/mm			
	L	D	d	l
MO1/2S	.248 ± .019 6.30 ± 0.5	.090 ± .019 2.3 ± 0.5	0.024 ± 0.002 0.6 ± 0.05	1.18 ± 0.12 30 ± 3
MO1S	0.354±0.039 9±1	0.137±0.019 3.5±0.5	0.023±0.002 0.6±0.05	1.18±0.12 30±3
MO2S	0.433±0.039 11±1	0.157±0.019 4±0.5	0.03±0.002 0.8±0.05	1.18±0.12 30±3
MO3S	0.59±0.039 15±1	0.236±0.039 6±1	0.03±0.002 0.8±0.05	1.5±0.12 38±3
MO5S	0.964±0.039 24.5±1	0.354±0.039 9±1	0.03±0.002 0.8±0.05	1.5±0.12 38±3

RATING

Style	Rated Wattage at 70°	Max Working V.	Max Overload V.	Dielectric Withstanding Voltage	Resistance Range	
					G(±2%)	J(±5%)
	1/2W	350V	600V	350V	.2 ~ 47KΩ	0.1Ω ~ 100K
MO1B	1W	350V	700V	600V	.2 ~ 56KΩ	0.1Ω ~ 820K
MO1S		350V	600V	500V		
MO2B	2W	350V	700V	1000V	.2 ~ 100KΩ	0.1Ω ~ 1 Meg
MO2S		350V	700V	600V		
MO3S	3W	350V	700V	1000V	.2 ~ 100KΩ	0.1Ω ~ 560K
MO3B		500V	1000V	1000V		
MO5S	5W	500V	1000V	1000V	.2 ~ 150KΩ	0.1Ω ~ 200K

ORDERING INFORMATION

MO	XX	XXXX	XXX
STYLE	TOLERANCE	RES. VALUE	PACKAGING

PACKAGING:	AMMO	= A
	TAPE AND REEL	= TR
	BULK	= B