


THIN FILM CHIP RESISTORS


(RMT and RPT SERIES)

Features

1. Low TCR
2. High Precision ($\pm 0.5\%$ up to $\pm 0.01\%$)
3. Low Current noise
4. High Stability
5. RPT Series is enhanced power thin film resistors, higher working voltages and higher temperature capabilities compare to RMT Series.

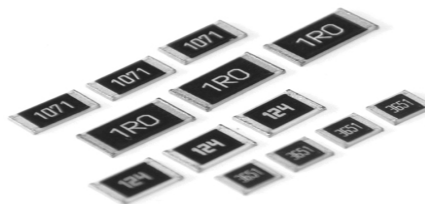

Dimensional Specifications

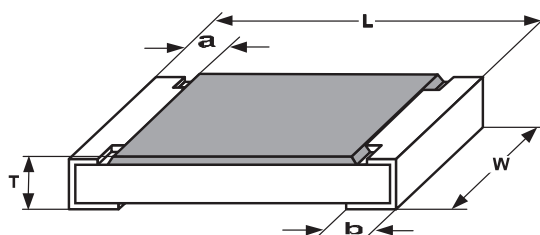

STYLE		Size code	Dimensions : mm				
			L	W	T	a	b
RMT-04		0402	1.00 ± 0.10	0.50 ± 0.05	0.30 ± 0.05	0.25 ± 0.10	0.20 ± 0.10
RMT-06	RPT-06	0603	1.60 ± 0.10	0.80 ± 0.10	0.45 ± 0.10	0.30 ± 0.15	0.30 ± 0.15
RMT-10	RPT-10	0805	2.00 ± 0.15	1.25 ± 0.15	0.55 ± 0.10	0.30 ± 0.20	0.40 ± 0.25
RMT-18	RPT-18	1206	3.10 ± 0.15	1.55 ± 0.15	0.55 ± 0.10	0.50 ± 0.20	0.40 ± 0.25
RMT-20	RPT-20	1210	3.10 ± 0.15	2.60 ± 0.15	0.55 ± 0.10	0.50 ± 0.20	0.50 ± 0.25
RMT-22	RPT-22	2010	4.90 ± 0.15	2.40 ± 0.15	0.55 ± 0.10	0.60 ± 0.20	0.50 ± 0.25
RMT-24	RPT-24	2512	6.35 ± 0.15	3.20 ± 0.15	0.55 ± 0.10	0.60 ± 0.20	0.50 ± 0.25

Marking



RMT-04(0402)

No Marking



RMT-10(0805)

RMT-18(1206)

RMT-20(1210)

RMT-22(2010)

RMT-24(2512)

1% marking
Value=10K Ω



RMT-06(0603)

marking
Value=10K Ω



Marking Explanation

- 5% tolerance: 3 digits,
first two digits are significant figure
third digit is number of zeros, Letter R is decimal point.
- 1% tolerance: 4 digits, first three digits are significant figure, Letter R is decimal point.
- 0201, 0402 no marking

Electrical Characteristics

RMT Series

Style	RMT-04	RMT-06	RMT-10	RMT-18	RMT-20	RMT-22	RMT-24
	0402	0603	0805	1206	1210	2010	2512
Power Rating at 70°C	1/16W	1/16W	1/10W	1/8W	1/4W	1/2W	3/4W
Operating Temp.Range	-55°C ~ +155°C						
Derated to 0 Load at	+ 155°C						
Maximum Working Voltage	25V	50V	100V	150V	150V	200V	200V
Maximum Overload Voltage	50V	100V	200V	300V	300V	400V	400V
Temperature Coefficient	±5ppm/°C; ±10ppm/°C; ±15ppm/°C; ±25ppm/°C; ±50ppm/°C						

RPT Series (Thin Film High Power)

Style	RPT-06	RPT-10	RPT-18	RPT-20	RPT-22	RPT-24
	0603	0805	1206	1210	2010	2512
Power Rating at 70°C	1/10W	1/8W	1/4W	1/3W	3/4W	1W
Operating Temp.Range	-55°C ~ +155°C					
Derated to 0 Load at	+ 155°C					
Maximum Working Voltage	75V	150V	200V	200V	200V	200V
Maximum Overload Voltage	150V	300V	400V	400V	400V	400V
Temperature Coefficient	±5ppm/°C; ±10ppm/°C; ±15ppm/°C; ±25ppm/°C; ±50ppm/°C					

* Power higher than above resistance range is available, consult with Cinetech engineering before order.



Environmental Characteristics

PERFORMANCE TEST	TEST METOHD	RATING
Temperature Coefficient (by Type)	MIL-STD-202F, Method 304 -55°C to +125°C	± 5 - 50 ppm/°C
Thermal Shock	MIL-STD-202F, Method 107 5 cycles, -65°C to +155°C	± (0.5%+0.05Ω)
Low Temperature Operation	MIL-R-55342D, Para. 4.7.4 One hour at -65°C followed by 45 minutes RCWV	± (0.5%+0.05Ω)
Short Time Overload	MIL-R-55342D, Para. 4.7.5 2.5 times RCWV for 5 seconds	± (0.5%+0.05Ω)
High Temperature Exposure	MIL-R-55342D, Para. 4.7.6 125°C to 100 hours	± (0.5%+0.05Ω)
Resistance to Soldering Heat	MIL-R-55342D, Para. 4.7.7 Soldered to test board at 260°C for 10 seconds	± (0.5%+0.05Ω)
Moisture Resistance	MIL-STD-202F, Method 106 10 cycles. Total 240 hours	± (0.5%+0.05Ω)
Life	MIL-STD-202F, Method 108A 1000 hours at 70°C RWV intermittent	± (0.5%+0.05Ω)
Solderability	MIL-STD-202F, Method 208 230°C for 5 seconds	95%min.coverage
Bending Strength	Unit mounted in center of 90mm board length, deflected for 5mm in either direction for 10 seconds	± (0.5%+0.05Ω)

Available Resistance Range

Type	Resistance Tolerance	Resistance Range	TCR ppm/°C
RMT-04 0402	±0.01%	49.9Ω - 4.99K	±5
	±0.05%, ±0.01%	49.9Ω - 12K	±10, ±15
	±0.5%, ±0.25%, ±0.1%	10Ω - 200K	±25, ±50
	±0.1%	49.9Ω - 69.8K	±10, ±15
RMT-06 (RPT-06) 0603	±0.01%	24.9Ω - 15K	±5
		24.9Ω - 100K	±10, ±15
	±0.05%	4.7Ω - 332K	±10, ±15
		4.7Ω - 332K	±25, ±50
	±0.5%, ±0.25%, ±0.1%	4.7Ω - 1M	±25, ±50
RMT-10 (RPT-10) 0805	±0.01%	4.7Ω - 332K	±10, ±15
		24.9Ω - 30K	±5
	±0.05%	24.9Ω - 200K	±10, ±15
		4.7Ω - 511K	±10, ±15
	±0.5%, ±0.25%, ±0.1%	4.7Ω - 511K	±25, ±50
		4.7Ω - 1M	±25, ±50
	±0.1%	4.7Ω - 1M	±10, ±15



Available Resistance Range

Type	Resistance Tolerance	Resistance Range	TCR ppm/°C
RMT-18 (RPT-18) 1206	±0.01%	24.9Ω - 49.9K	±5
		24.9Ω - 499K	±10, ±15
	±0.05%	4.7Ω - 1M	±10, ±15
		4.7Ω - 1M	±25, ±50
	±0.5%, ±0.25%, ±0.1%	4.7Ω - 1M	±25, ±50
RMT-20 (RPT-20) 1210	±0.01%	24.9Ω - 49.9K	±5
		24.9Ω - 499K	±10, ±15
	±0.05%	4.7Ω - 1M	±10, ±15
		4.7Ω - 1M	±25, ±50
	±0.5%, ±0.25%, ±0.1%	4.7Ω - 1M	±25, ±50
RMT-22 (RPT-22) 2010	±0.01%	24.9Ω - 49.9K	±5
		24.9Ω - 499K	±10, ±15
	±0.05%	4.7Ω - 1M	±10, ±15
		4.7Ω - 1M	±25, ±50
	±0.5%, ±0.25%, ±0.1%	4.7Ω - 1M	±25, ±50
RMT-24 2512	±0.01%	24.9Ω - 100K	±5
		24.9Ω - 499K	±10, ±15
	±0.05%	4.7Ω - 1M	±10, ±15
		4.7Ω - 1M	±25, ±50
	±0.5%, ±0.25%, ±0.1%	4.7Ω - 1M	±25, ±50
RPT-24 2512	±0.1%	4.7Ω - 1M	±10, ±15
RPT-24 2512	±0.5%, ±0.25%, ±0.1%	4.7Ω - 100Ω	±25, ±50

* TCR beyond above resistance range is available, please consult with Cinetech engineering before order.

Parts Number System

RMT-06	1002	D	R	E
Type	Resistance Value	Tolerance	Packaging codes	TCR
RMT-06 (0603) RPT-06 (0603)	Please refer to marking explanation	D=±0.5% B=±0.1% C=±0.25% A=±0.05% T=±0.01%	R=Paper tape reel K=Embossed plastic tape reel Please refer to packaging explanation	S=± 5ppm/°C T=±10ppm/°C H=±15ppm/°C E=±25ppm/°C C=±50ppm/°C

