

Features:

- Integrally molded polarization
- Integrally molded mountings ears available
- 94V-2 rated nylon
- Friction lock
- Standard color: Nature


Specifications:

- Current rating: 5A AC, DC
- Voltage rating: 250V AC, DC
- Insulation resistance: 1000MΩ min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 125°C

H1158-05PSNW00R

(W/O Ear)



H1158-05PSRW00R

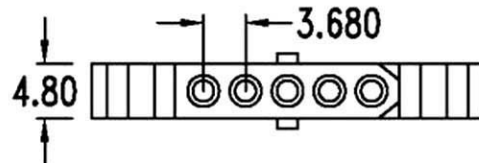

H1058-05PSNW00R

(W/O Ear)

H1058-05PSRW00R

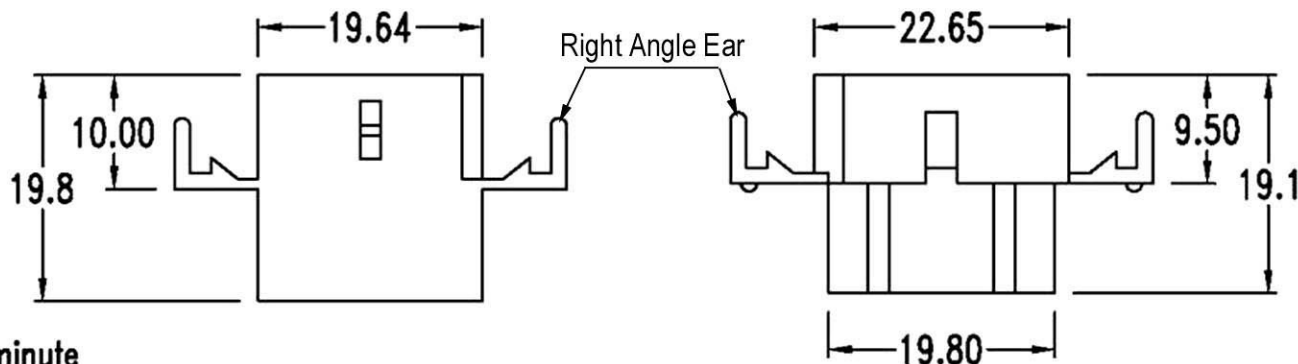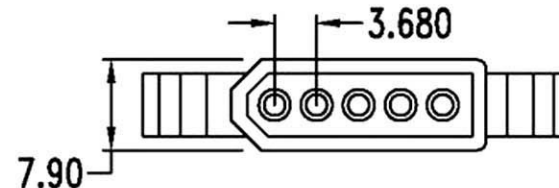

Male Housing



Female Housing

**RoHS
Compliant**

HMT/Lake-View Electronics

APPD. 核准		TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖		SCALE 比例	
DATE 制表日	UNIT 單位	SIZE 紙張尺寸	PART NO. 料號
2006/07/03	M M	A 4	
	PAGE 張數	REV. 版本	
	1 OF 1	A	H1058 & H1158 RoHS Series-4

Jolin