

\* Poles:2-20

\* Material:NYLON 66 UL 94 V-0 Color: White

Specifications

\* Current rating: 3A AC, DC


\* Voltage rating: 250V AC, DC

\* Temperature range: -25°C~+85°C

\* Insulation resistance: 1,000MΩ min.

\* Withstand voltage: 1,000V AC/minute

CIRCUITS	DIMENSION in.(mm)	
	A	B
2	0.100(2.54)	0.222(5.65)
3	0.200(5.08)	0.322(8.19)
4	0.300(7.62)	0.422(10.73)
5	0.400(10.16)	0.522(13.27)
6	0.500(12.70)	0.622(15.81)
7	0.600(15.24)	0.722(18.32)
8	0.700(17.78)	0.822(20.89)
9	0.800(20.32)	0.922(23.43)
10	0.900(22.86)	1.022(25.97)
11	1.000(25.40)	1.122(28.51)
12	1.100(27.94)	1.222(31.05)
13	1.200(30.48)	1.322(33.59)
14	1.300(33.02)	1.422(36.13)
15	1.400(35.56)	1.522(38.67)
16	1.500(38.10)	1.622(41.21)
17	1.600(40.64)	1.722(43.75)
18	1.700(43.18)	1.800(46.29)
19	1.800(45.72)	1.922(48.83)
20	1.900(48.26)	2.022(51.37)

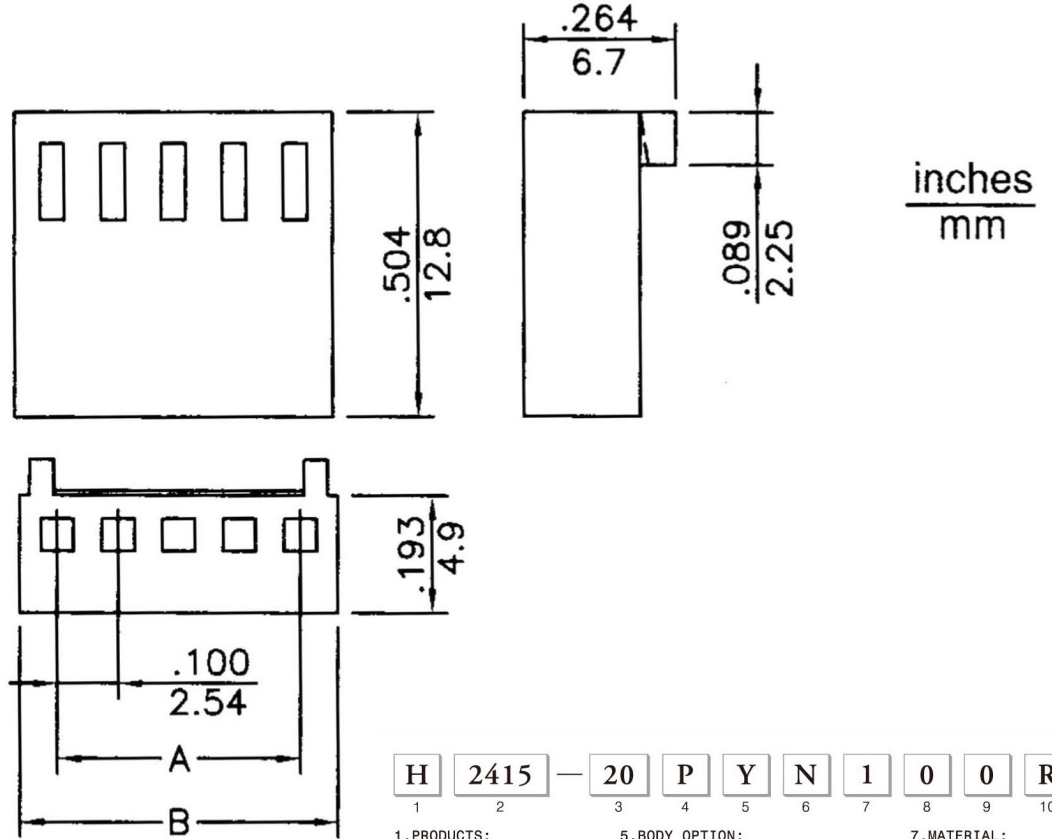

H	2415	—	20	P	Y	N	1	0	0	R
1	2		3	4	5	6	7	8	9	10

1. PRODUCTS: H:Housing  
 2. SERIES NO.: 2415  
 3. CONTACT NO.: 02-20  
 4. CONTACT TYPE: P:Non Distribution  
 5. BODY OPTION: Y:W/ Locking Rib & Polarizing Rib  
 6. INSULATOR COLOR: N:Brown W:White  
 7. MATERIAL: 1:Nylon 66 UL94-V0  
 8. FILL IT WITH "0"  
 9. FILL IT WITH "0"  
 10. R:ROHS

RoHS Compliant		<b>HMT / Lake-View Electronics</b>	
APPD. 核准	SCALE 比例 参考	TOLERANCE 容許公差 .0 ± .00 ± ANG ±	PART NAME 品名 2.54mm HOUSING 1X??P WITH LOCKING RAMP WITH POLARIZING RIBS NYLON 66 UL94V-0 WHITE INSULATOR ROHS
DWG. 製圖 HELEN	UNIT 單位 MM	SIZE. 紙張尺寸 A 4	PART NO. 料號 H2415-XXPYW100R
DATE 制表日 2017/3/15	PAGE 張數 1 OF 1	REV. 版次 A	