




Features:

- Integrally molded polarization
- Material: UL 94V-0 or UL 94V-2
- Friction lock
- Standard color: Nature
- Recommended panel thickness: .030" ~ .090"(0.762 ~ 2.286mm)

Specifications:

- Current rating: 13A
- Voltage rating: 600V
- Insulation resistance: 1000M Ω Min.
- Dielectric withstanding voltage: 5000V AC/minute
- Ambient temperature range: -55°C ~ 105°C

Part No.	Material
H6351-06PDW001R	UL 94V-0
H6351-06PDW000R	UL 94V-2

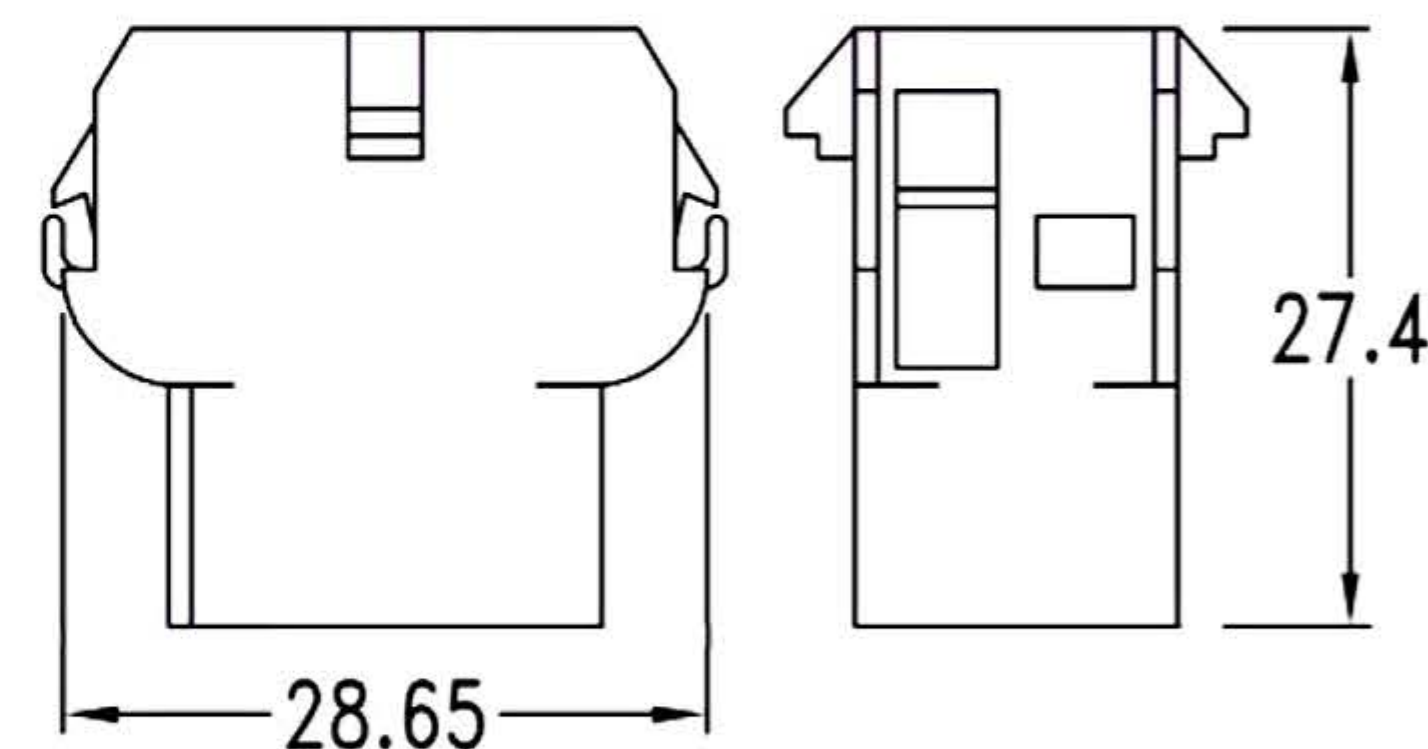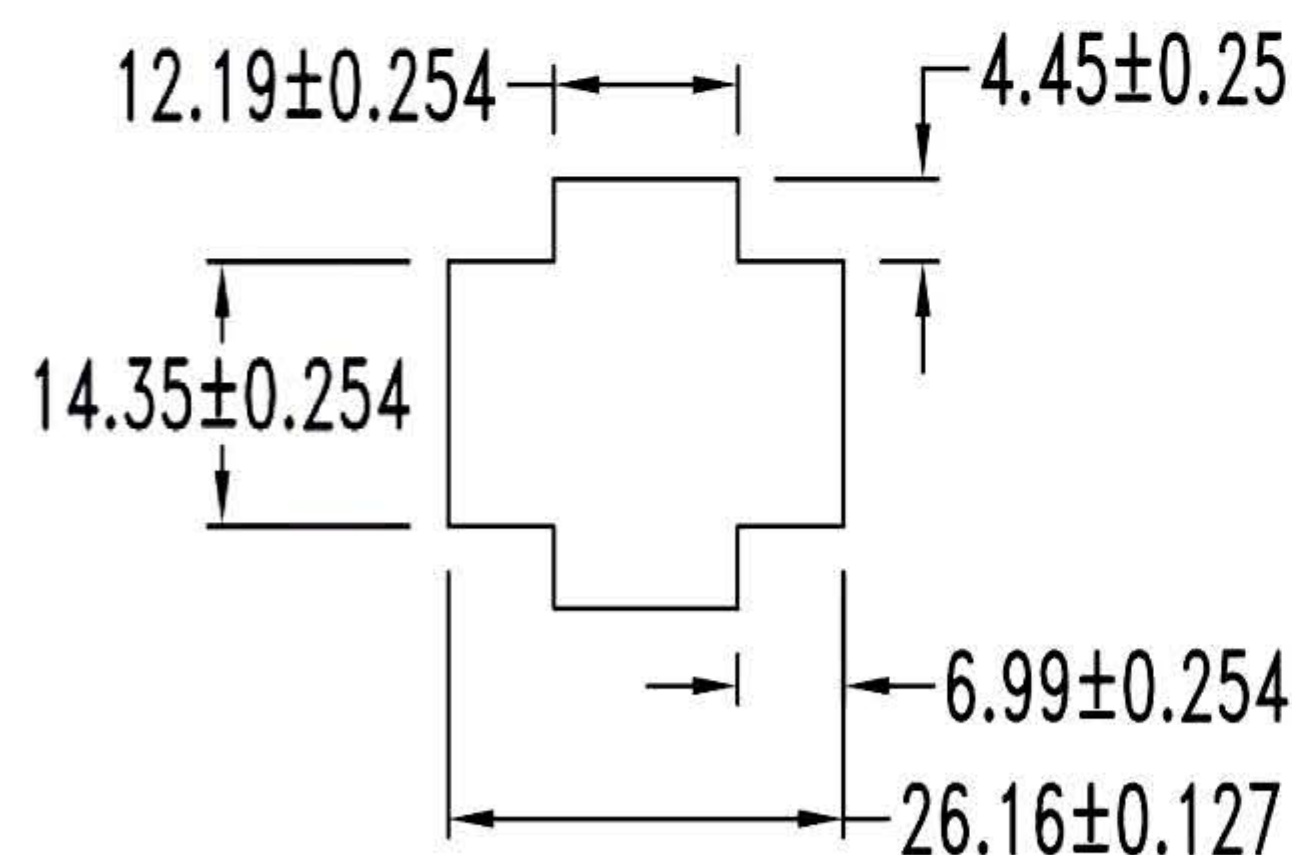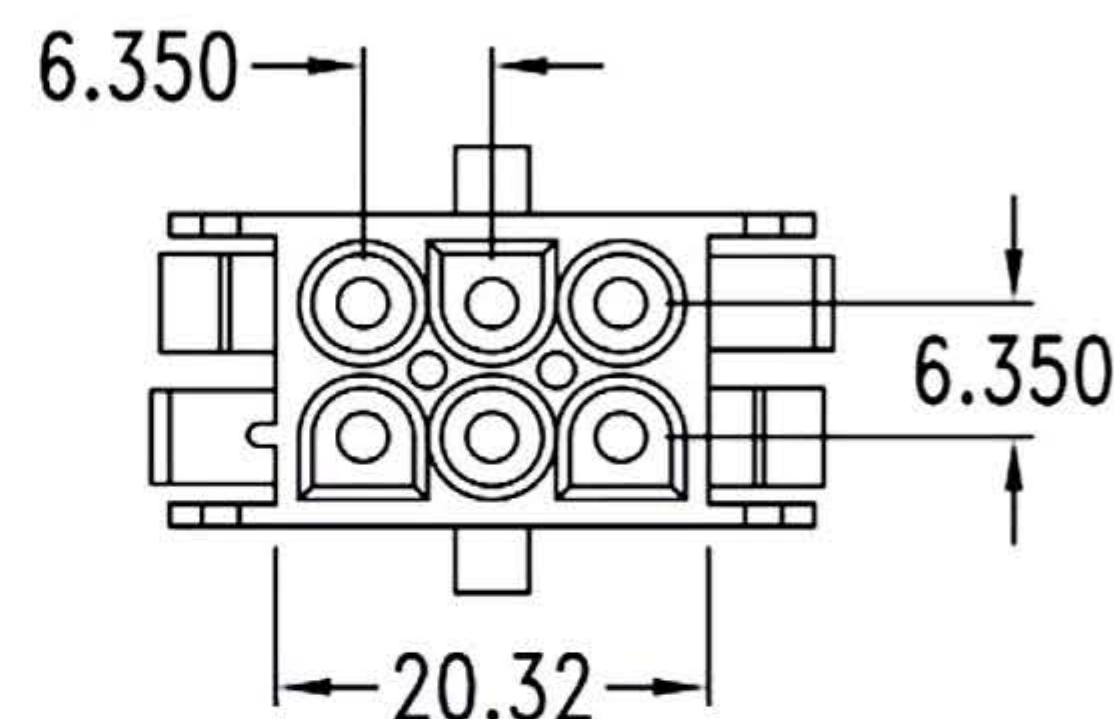

&& Panel must be punched so that housing enters panel in same direction as the punch.

RoHS
Compliant


APPD.
核准

DWG.
製圖

DATE 制表日

2014/8/20

SCALE
比例 參考



UNIT
單位 M M

PAGE
張數 1 OF 1

TOLERANCE
容許公差

SIZE
紙張尺寸 A 4

REV.
版本 A

PART NAME 品名

6.35mm FEMALE HOUSING 2X3P
NYLON66 WHITE INSULATOR ROHS

PART NO.

料號 H6351-06PDW00XR