



File No.:E75887



FEATURES

- Sensitive type and standard type are available
- Fully Sealed

CONTACT RATINGS

Contact Arrangement	2C
Contact Resistance	50mΩ(0.1A 6VDC)
Contact Material	Silver Alloy, Gold Flash
Contact Rating(Resistive)	2A/30VDC, 2.5A/12VDC 0.5A/125VAC, 0.6A/120VAC
Minimum Load	1mA/10mV(Reference Value)
Max. Switching Voltage	150VAC/125VDC
Max. Switching Current	2A
Max. Switching Power	75VA/60W
Mechanical Life	1×10 ⁸ operations
Electrical Life	1×10 ⁵ operations

CHARACTERISTICS

Insulation Resistance		1000MΩ (at 500VDC)
Dielectric Strength	Between coil & contacts	1000VAC 1min
	Between open contacts	1000VAC 1min
Operate time (at nomi. volt.)		≤7ms
Release time (at nomi. volt.)		≤5ms
Humidity		98% RH, 40°C
Ambient temperature		-25°C ~ +85°C
Shock Resistance	Functional	100m/s ²
	Destructive	980m/s ²
Vibration resistance		10Hz ~ 55Hz 1.5mm DA
Unit weight		Approx. 5g
Construction		Sealed Type

Notes:1) The data shown above are initial values.

2) Please find coil temperature curve in the characteristic curved below.

ORDERING INFORMATION

CAS112/CS212 DC12 - XXXX

Model: _____

CAS112=Standard type

CS212=Sensitive type

Coil Voltage _____

Customer code _____

COIL DATA

at 20°C

Standard Type

Nominal Voltage VDC	Pick-up Voltage (Max.) VDC	Drop-out Voltage (Min.) VDC	Max. Allowable Voltage VDC	Coil Resistance Ω±10%
5	3.5	0.5	7.0	45
6	4.2	0.6	8.4	66
9	6.3	0.9	12.3	140
12	8.4	1.2	17.4	280
24	16.8	2.4	34.0	1070
48	33.6	4.8	64.9	3900

Sensitive Type

Nominal Voltage VDC	Pick-up Voltage (Max.) VDC	Drop-out Voltage (Min.) VDC	Max. Allowable Voltage VDC	Coil Resistance Ω±10%
5	3.5	0.25	12.5	167
6	4.2	0.30	15.0	240
9	6.3	0.45	22.5	540
12	8.4	0.60	30.0	960
18	12.6	0.90	40.0	1620
24	16.8	1.20	52.9	2880
48	33.6	2.40	84.9	7680

This datasheet is for customers' reference. All the specifications are subject to change without notice.



RELAYS

Lake-View Electronics Corp. 1054 Pioneer Rd. Grafton, WI Ph: 262-377-8250 Fax: 262-375-0109

www.lvelectronics.com

Email: sales@lvelectronics.com

CAS/CS SERIES

DPDT

2 Amp

COIL

Coil Power	Standard Type: 500mW ~ 590mW
	Sensitive Type: 150mW ~ 300mW


SAFETY APPROVAL RATINGS

UL&CUL	2A/30VDC, 0.6A/125VAC
--------	--------------------------


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT.

Unit: inch(mm)


Outline Dimensions

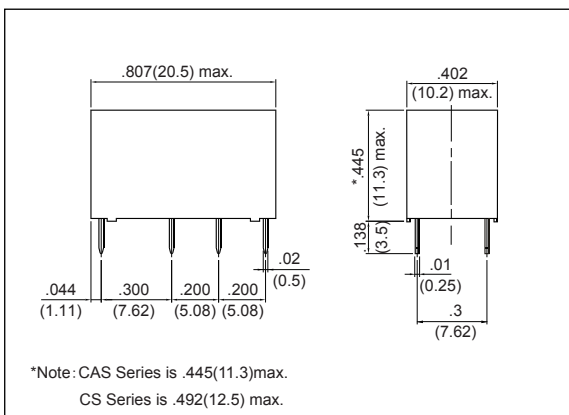

Wiring Diagram (Bottom view)






PCB Layout (Bottom view)



Remark: 1) In case of no tolerance shown in outline dimension: outline dimension $\leq 1\text{mm}$, tolerance should be $\pm 0.2\text{mm}$; outline dimension $> 1\text{mm}$ and $\leq 5\text{mm}$, tolerance should be $\pm 0.3\text{mm}$; outline dimension $> 5\text{mm}$, tolerance should be $\pm 0.4\text{mm}$.
2) The tolerance without indicating for PCB layout is always $\pm 0.1\text{mm}$.

CHARACTERISTIC CURVES

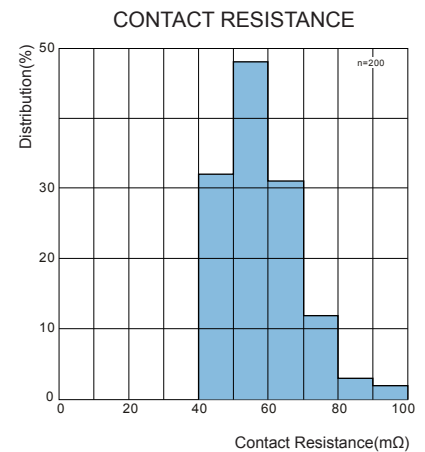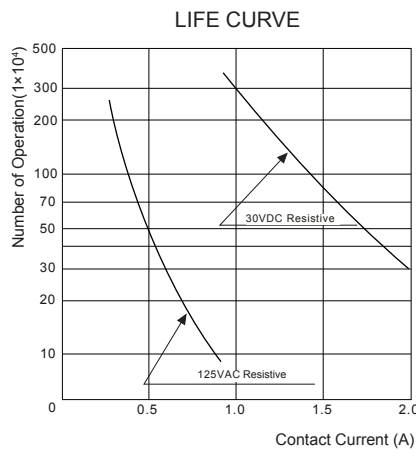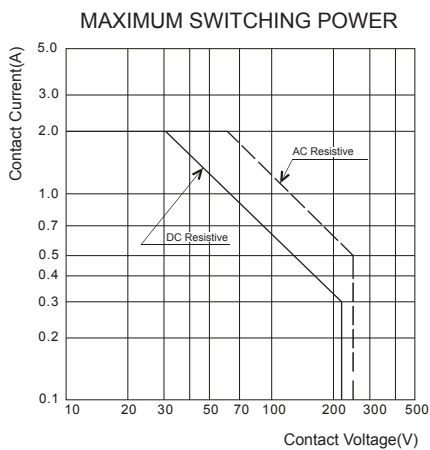

This datasheet is for customers' reference. All the specifications are subject to change without notice.



RELAYS

Lake-View Electronics Corp. 1054 Pioneer Rd. Grafton, WI Ph: 262-377-8250 Fax: 262-375-0109

www.lvelectronics.com

Email: sales@lvelectronics.com