


Part No.

933332051 - Single - Min Order Qty: 1



933332057 - Bulk - Min Order Qty: 200

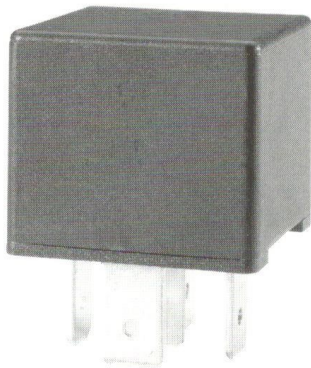


Mini ISO Relay

- 12 Volt
- SPDT / Form C
- 40 Amp Continuous
- Dust Cover

Diagram



Dimension Drawing

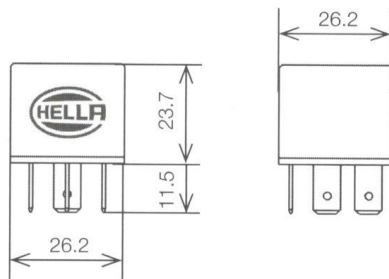

Accessories

- H84989031** RELAY SOCKET MINI 5 TERM PRINTED CIRCUIT BOARD, Qty: 1
H84989037 RELAY SOCKET MINI 5 TERM PRINTED CIRCUIT BOARD, Qty: 50
H84989011 RELAY SOCKET MINI 5 TERM W/ BRACKET, Qty: 1
H84989017 RELAY SOCKET MINI 5 TERM W/ BRACKET, Qty: 50
U84989017 RELAY SOCKET MINI 5 TERM W/ BRACKET, Qty: 1,000
H84526001 RELAY SOCKET MINI 5/9 TERM W/ BRACKET, Qty: 1
003526002 RELAY SOCKET MINI 5/9 TERM W/ BRACKET, Qty: 50
003526001 RELAY SOCKET MINI 5/9 TERM W/ BRACKET, Qty: 1,000
H84989021 RELAY SOCKET MINI 5 TERM F/HARNESS, Qty: 1
H84989027 RELAY SOCKET MINI 5 TERM F/HARNESS, Qty: 50
701235033 TERMINAL 6.3MM x 0.8MM W/ CATCH, Qty: 100
701235034 TERMINAL 6.3MM x 0.8MM W/ CATCH, Qty: 1,500

*All measurements are in Millimeters.

Nominal Voltage	12V	Operating / Releasing Time	≤ 10 ms / ≤ 5 ms
Rated Continuous Load	N/O 40A N/C 20A at 85°C	Dielectric Strength	≥ 1,000 VDC
Ambient Temperature	-40°C...+85°C	Max. Inrush Load	150A
Contact Form	1 Form C / SPDT	Resistive Load / Switching Cycles	N/O 40A N/C 20A, 100,000 cycles
Contact Material	AgSnO2	Inductive load / Switching Cycles	N/O 20A, 100,000 cycles N/C 6A, 60,000 cycles
Operating / Drop out Voltage	≤ 8.0V / ≥ 1.0V	Lamp Load (capacitive) / Switching Cycles	N/O 20A N/C 10A, 100,000 cycles
Max.Coil Voltage	20V	Vibration	20 – 200 Hz, 5 g; no contact openings > 10 μs
Coil Resistance	85 Ohm ± 10%	Mechanical Shock	Min. 10 g, 11 ms; no contact openings > 10 μs
Suppression	None	IP Rating	IP54 DIN IEC 60 529
Mechanical Cycles	10,000,000	Terminals	85, 86: ISO 8092 6.3 x 0.8, E-Cu, tin plated 30, 87, 87a: ISO 8092 6.3 x 0.8, E-Cu, tin plated

Notes

Cross Reference

Bosch

0 986 332 022
 0 332 209 151

Tyco

VF4-15F11
 V23134-A0052-C643

Song Chuan

896H-1CH-C-12V
 896H-1CH-D-12V