



**Part No.**

**933332161 - Single - Min Order Qty: 1**  
**933332167 - Bulk - Min Order Qty: 200**

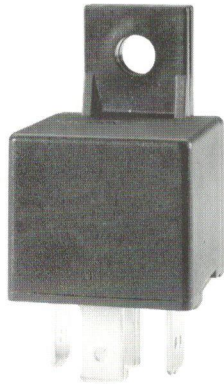

**Dimension Drawing**

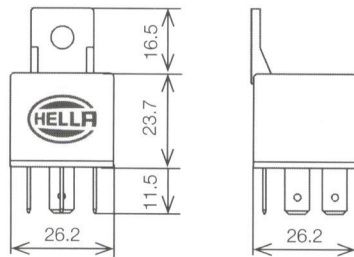



**Technical Data**

<b>Nominal Voltage</b>	24V	<b>Operating / Releasing Time</b>	≤ 10 ms / ≤ 10 ms
<b>Rated Continuous Load</b>	N/O 20A   N/C 10A at 85°C	<b>Dielectric Strength</b>	≥ 1,000 VDC
<b>Ambient Temperature</b>	-40°C...+85°C	<b>Max. Inrush Load</b>	120A
<b>Contact Form</b>	1 Form C / SPDT	<b>Resistive Load / Switching Cycles</b>	N/O 20A, 100,000 cycles N/C 10A, 150,000 cycles
<b>Contact Material</b>	AgSnO2	<b>Inductive load / Switching Cycles</b>	N/O 16A, 100,000 cycles N/C 8A, 100,000 cycles
<b>Operating / Drop out Voltage</b>	≤ 15.6V / ≥ 2.4V	<b>Lamp Load (capacitive) / Switching Cycles</b>	N/O 15A, 135,000 cycles N/C 5A, 135,000 cycles
<b>Max.Coil Voltage</b>	40V	<b>Vibration</b>	20 – 200 Hz, 5 g; no contact openings > 10 μs
<b>Coil Resistance</b>	271 Ohm ± 10% (incl. suppression component)	<b>Mechanical Shock</b>	Min. 10 g, 11 ms; no contact openings > 10 μs
<b>Suppression</b>	Resistor, 1200 Ohm	<b>IP Rating</b>	IP54 DIN IEC 60 529
<b>Mechanical Cycles</b>	10,000,000	<b>Terminals</b>	85, 86: ISO 8092 6.3 x 0.8, E-Cu, tin plated 30, 87, 87a: ISO 8092 6.3 x 0.8, E-Cu, tin plated

**Mini ISO Relay**

- 24 Volt
- SPDT / Form C
- Resistor Coil Suppression
- 20 Amp Continuous
- Mounting Bracket

**Diagram**



**Accessories**

- H84989031** RELAY SOCKET MINI 5 TERM PRINTED CIRCUIT BOARD, Qty: 1
- H84989037** RELAY SOCKET MINI 5 TERM PRINTED CIRCUIT BOARD, Qty: 50
- H84989011** RELAY SOCKET MINI 5 TERM W/ BRACKET, Qty: 1
- H84989017** RELAY SOCKET MINI 5 TERM W/ BRACKET, Qty: 50
- U84989017** RELAY SOCKET MINI 5 TERM W/ BRACKET, Qty: 1,000
- H84526001** RELAY SOCKET MINI 5/9 TERM W/ BRACKET, Qty: 1
- 003526002** RELAY SOCKET MINI 5/9 TERM W/ BRACKET, Qty: 50
- 003526001** RELAY SOCKET MINI 5/9 TERM W/ BRACKET, Qty: 1,000
- H84989021** RELAY SOCKET MINI 5 TERM F/HARNESS, Qty: 1
- H84989027** RELAY SOCKET MINI 5 TERM F/HARNESS, Qty: 50
- 701235033** TERMINAL 6.3MM x 0.8MM W/ CATCH, Qty: 100
- 701235034** TERMINAL 6.3MM x 0.8MM W/ CATCH, Qty: 1,500

\*All measurements are in Millimeters.

**Notes**

**Cross Reference**

<b>Bosch</b>	<b>Song Chuan</b>
0 332 209 207	896H-1CH-C1-R1-24V 896H-1CH-D1-R1-24V 896H-1CH-C1S-R1-24V 896H-1CH-D1S-R1-24V
<b>Cole Hersee</b>	
RC-200124-RN	
	<b>Tyco</b>
	VF4-45H11-S08

**Lake-View Electronics Corp. 1054 Pioneer Rd. Grafton, WI Ph: 262-377-8250 Fax: 262-375-0109**

[www.lvelectronics.com](http://www.lvelectronics.com)

Email: [sales@lvelectronics.com](mailto:sales@lvelectronics.com)

