


BI-COLOR & BI-POLAR LED LAMPS

Kingbright®

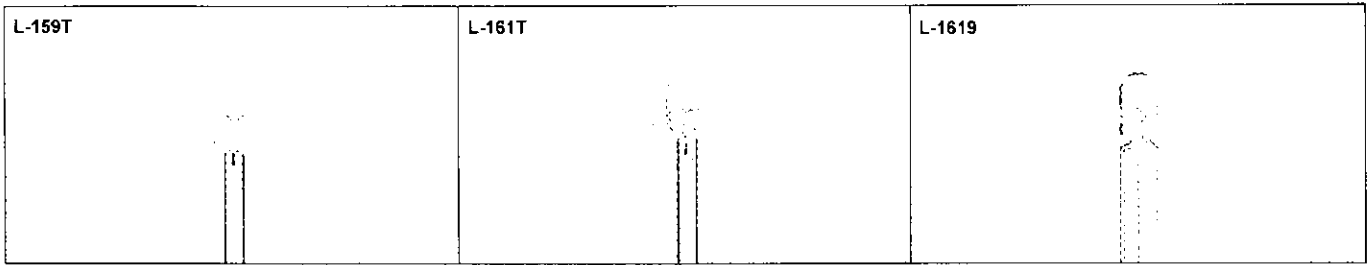

Part No.	Emitting Color + Material	Wave-length (nm)	Lens Type	Iv (mcd) @20mA		Viewing Angle	Dimension	
				Min.	Max.			
L-159TEEC	GaAsP/GaP	625	water clear	80	300	40°	<p>T-1 3/4 (5mm) Round</p>	
	GaAsP/GaP	625		80	300			
L-159TYYC	GaAsP/GaP	590	water clear	60	200	40°		
	GaAsP/GaP	590		60	200			
L-159TSGSGC	GaP	565	water clear	80	300	40°		
	GaP	565		80	300			
L-159TSRSRC	GaAlAs	660	water clear	300	1300	40°		
	GaAlAs	660		300	1300			
L-161TEEC	GaAsP/GaP	625	water clear	100	400	45°(H) 25°(V)		<p>T-1 3/4 (5mm) Oval</p>
	GaAsP/GaP	625		100	400			
L-161TYYC	GaAsP/GaP	590	water clear	100	300	45°(H) 25°(V)		
	GaAsP/GaP	590		100	300			
L-161TSGSGC	GaP	565	water clear	100	300	45°(H) 25°(V)		
	GaP	565		100	300			
L-161TSRSRC	GaAlAs	660	water clear	500	2000	45°(H) 25°(V)		
	GaAlAs	660		500	2000			
L-1619URURC-CA	GaAlAs	660	water clear	480	2000	60°(H) 30°(V)	<p>T-1 3/4 (5mm) Oval</p> <p>1 CATHODE RED 2 COMMON ANODE 3 CATHODE RED</p>	
	GaAlAs	660		480	2000			