


# WIREWOUND RESISTORS

# MEMCOR- TRUOHM INC.

## EDGEWOOD — TYPE TRU-RIB — 40 TO 1500 WATT

A	B	C	D	E	F	G	Wattage
3/16	5/16	2	11/16	5/16	1/8	.187	RR-0040
3/16	3/16	4	3/4	1/2	1/4	.196	RR-0090
3/4	1/2	3 1/2	3/4	1/2	1/4	.196	RR-0100
3/16	5/16	5	3/4	1/2	1/4	.196	RR-0105
3/4	1/2	4	3/4	1/2	1/4	.196	RR-0105
1	5/8	4	3/4	1/2	1/4	.196	RR-0125
3/4	1/2	5	3/4	1/2	1/4	.196	RR-0135
1	5/8	5	3/4	1/2	1/4	.196	RR-0150
3/4	1/2	6	3/4	1/2	1/4	.196	RR-0160
3/4	1/2	6 1/2	3/4	1/2	1/4	.196	RR-0180
1 1/8	3/4	5	3/4	1/2	1/4	.196	RR-0185
1	5/8	6	3/4	1/2	1/4	.196	RR-0190
1	5/8	7	3/4	1/2	1/4	.196	RR-0215
1 1/8	3/4	6	3/4	1/2	1/4	.196	RR-0220
1 1/2	1 1/8	5	3/4	1/2	1/4	.196	RR-0270
1 1/8	3/4	8 1/2	3/4	1/2	1/4	.196	RR-0300
1	5/8	10	3/4	1/2	1/4	.196	RR-0315
1 1/8	3/4	10 1/2	3/4	1/2	1/4	.196	RR-0375
2 1/2	1 3/4	6	3/4	1/2	1/4	.196	RR-0375
1 5/8	1 1/8	8 1/2	3/4	1/2	1/4	.196	RR-0400
1 1/8	3/4	11 1/4	3/4	1/2	1/4	.196	RR-0420
1 5/8	1 1/8	10 1/2	3/4	1/2	1/4	.196	RR-0500
1 5/8	1 1/8	11 3/4	3/4	1/2	1/4	.196	RR-0550
2 1/2	1 3/4	12	3/4	1/2	1/4	.196	RR-0750
2 1/2	1 3/4	15	3/4	1/2	1/4	.196	RR-1000
2 1/2	1 3/4	20	3/4	1/2	1/4	.196	RR-1500

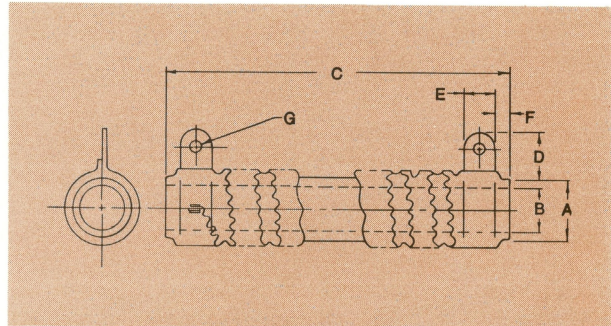

### FEATURES:

- Heavy duty unit designed for application demanding maximum power dissipation in minimum space.
- Heavy ceramic tubular core provides heat sink for short term overloads.
- Available from 40 to 1500 watts.
- Available with tap or adjustable lug.
- A variety of mounting hardware available. See Hardware section.
- Welded terminals and termination guarantee positive electrical connections.
- Tinned terminals provide reliable solder or mechanical connections.

### SPECIFICATIONS:

- Resistance Tolerance  $\pm 10\%$ .
- Temperature coefficient  $\pm 100$  ppm.
- Maximum Hotspot equal  $415^\circ\text{C}$ .
- Available resistance range  $.01\Omega$  to  $198\Omega$ .
- Meets or exceeds applicable specifications of MIL-R-26.
- Dimensional tolerances  $\pm \frac{1}{32}''$  . . . except  $\pm \frac{1}{16}''$  on length of  $6''$  and above.

## MILITARY — MADE TO MIL-R-26

Type		Rated Wattage V Characteristic	Min. Ohms	Max. Ohms
FERRULE	RW10	203	.20	180,000
	RW11	168	.10	160,000
	RW12	125	.10	110,000
	RW13	72	.10	51,000
	RW14	58	.10	43,000
	RW15	29	.10	15,000
	RW16	20	.10	8,200
OVAL	RW20	21	.10	8,200
	RW21	31	.10	16,000
	RW22	53	.10	36,000
	RW23	68	.10	51,000
	RW24	91	.10	75,000
TUBULAR	RW29	11	.10	5,600
	RW30	11	.10	2,700
	RW31	14	.10	6,800
	RW32	17	.10	10,000
	RW33	26	.10	18,000
	RW35	55	.10	43,000
	RW36	78	.10	56,000
	RW37	113	.10	91,000
	RW38	159	.10	150,000
	RW47	210	.10	180,000
	AXIAL	RW55	7	.10
RW56		14	.10	9,100
RW57		6.5	.10	3,600
RW58		11	.10	8,200
RW59		3	.10	910
RW67		6.5	.10	3,600
RW68		11	.10	8,200
RW69		3	.10	910

**MEMCOR-  
TRUOHM INC.**

Edgewood — Type TRU-RIB — 40 to 1500 Watt  
Military — Made to MIL-R-26

**WIREWOUND  
RESISTORS**

Lake-View Electronics Corp. 1054 Pioneer Rd. Grafton, WI Ph: 262-377-8250 Fax: 262-375-0109

[www.lvelectronics.com](http://www.lvelectronics.com)

Email: [sales@lvelectronics.com](mailto:sales@lvelectronics.com)