

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0196001302

Status:


Active

Overview:

Standard Quick-Disconnect Terminals

Description:

Avikrimp Fully Insulated Female Quick Disconnect

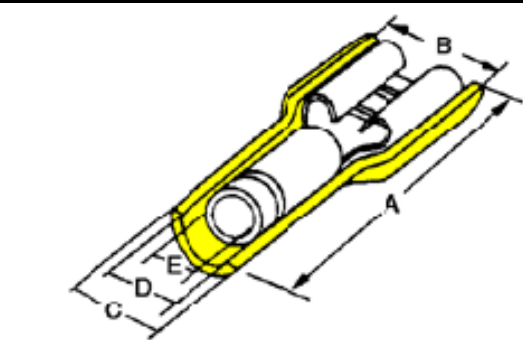

Series image - Reference only

Documents:

3D Model

Drawing (PDF)

Product Specification PS-19902-013-001 (PDF)

Product Specification PS-19902-014-001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR18689
UL	E79133
General	
Product Family	Quick Disconnects
Series	19600
Crimp Quality Equipment	Yes
Insulated	Fully
Overview	Standard Quick-Disconnect Terminals
Product Name	Avikrimp
Type	Quick Disconnect
UPC	800753117785
Physical	
Barrel Type	Closed
Color - Resin	Yellow
Flammability	94V-2
Gender	Female
Glow-Wire Capable	No
Insulation	Nylon (PA)
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Net Weight	1.300/g
Orientation	Straight
Packaging Type	Bag
Polarized to Mating Part	No
Tab Thickness	0.51mm
Tab Width	4.75mm
Temperature Range - Operating	-65°C to +105°C
Wire Insulation Diameter	6.89x4.32mm max.
Wire Size AWG	16+16, 18+18, 20+20, 22+22
Electrical	
Voltage - Maximum	300V
Solder Process Data	
Lead-freeProcess Capability	N/A
Material Info	
Engineering Number	P-5239
Reference - Drawing Numbers	
Product Specification	PS-19902-013-001, PS-19902-014-001
Sales Drawing	SD-19600-1300

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -
ED/30/2017 (7 July
2017)

Halogen-Free

Status

Low-Halogen

Need more information on product
environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any
non-product compliance questions.

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

19600 Series

This document was generated on 07/11/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION