


Fork terminals

Nylon-insulated forks & vinyl-insulated forks




Nylon-insulated forks – Flanged tongue

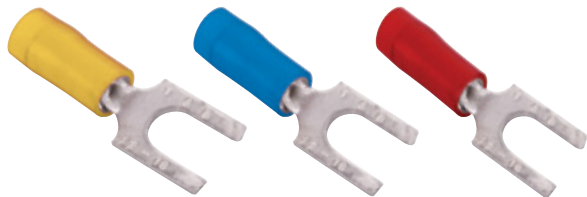

Cat. no.	Pkg. qty.	Wire range (AWG)	Max. ins. (in.)	Bolt hole (in.)	Rec. tool	Dimensions (in.)				Stock thick. (in.)
						A	B	C	M	
RA18-6FS	100	22-16	0.136	#6	ERG4001	0.75	0.28	0.16	0.62	0.02
RA1203	1,000	22-16	0.136	#6		0.75	0.28	0.16	0.62	
RA18-8FS	100	22-16	0.136	#8		0.89	0.31	0.23	0.65	
RA1223	1,000	22-16	0.136	#8		0.89	0.31	0.23	0.65	
RA18-10FS	100	22-16	0.136	#10		0.93	0.38	0.26	0.68	
RA1253	1,000	22-16	0.136	#10		0.93	0.38	0.26	0.68	
RB14-6FS	100	18-14	0.162	#6		0.74	0.28	0.16	0.60	0.03
RB1203	1,000	18-14	0.162	#6		0.74	0.28	0.16	0.60	
RB14-8FS	100	18-14	0.162	#8		0.89	0.31	0.23	0.66	
RB1223	1,000	18-14	0.162	#8		0.89	0.31	0.23	0.66	
RB14-10FS	100	18-14	0.162	#10		0.94	0.38	0.27	0.69	
RB1253	1,000	18-14	0.162	#10		0.94	0.38	0.27	0.69	
RB1204	1,000	18-14	0.190	#6		0.79	0.28	0.16	0.67	
RB1224	1,000	18-14	0.190	#8		0.94	0.31	0.23	0.71	
RC10-8FS	50	12-10	0.210	#8		0.97	0.34	0.23	0.73	0.04
RC1223	500	12-10	0.210	#8		0.97	0.34	0.23	0.73	
RC10-10FS	50	12-10	0.210	#10		1.00	0.38	0.26	0.74	
RC1253	500	12-10	0.210	#10		1.00	0.38	0.26	0.74	
RC1224	1,000	12-10	0.250	#8		1.08	0.34	0.23	0.80	
RC1254	1,000	12-10	0.250	#10		1.12	0.38	0.26	0.86	

Diagram




Vinyl-insulated forks



Cat. no.	Pkg. qty.	Wire range (AWG)	Max. ins. (in.)	Bolt hole (in.)	Rec. tool	Dimensions (in.)				Stock thick. (in.)
						A	B	C	M	
18RA-6F	100	22-16	0.150	#6	ERG4001	0.94	0.25	0.27	0.81	0.02
RA1167	1,000	22-16	0.150	#6		0.94	0.25	0.27	0.81	
18RA-8F	100	22-16	0.150	#8		0.97	0.31	0.27	0.81	
RA1147	1,000	22-16	0.150	#8		0.97	0.31	0.27	0.81	
18RA-10F	100	22-16	0.150	#10		0.97	0.31	0.27	0.81	
RA1157	1,000	22-16	0.150	#10		0.97	0.31	0.27	0.81	
14RB-6F	100	18-14	0.170	#6		0.97	0.31	0.27	0.81	0.03
RB647	1,000	18-14	0.170	#6		0.97	0.31	0.27	0.81	
14RB-6FS	100	18-14	0.170	#6		0.89	0.30	0.25	0.75	
14RB-8F	100	18-14	0.170	#8		0.97	0.31	0.27	0.81	
RB657	1,000	18-14	0.170	#8		0.97	0.31	0.27	0.81	
14RB-10F	100	18-14	0.170	#10		0.97	0.31	0.27	0.81	
RB1157	1,000	18-14	0.170	#10		0.97	0.31	0.27	0.81	
14RB-14F	100	18-14	0.170	1/4		1.11	0.44	0.38	0.89	
RB1717	1,000	18-14	0.170	1/4		1.11	0.44	0.38	0.89	
10RC-6F	50	12-10	0.210	#6		1.09	0.31	0.27	0.90	0.04
RC1337	500	12-10	0.210	#6		1.09	0.31	0.27	0.90	
10RC-8F	50	12-10	0.210	#8		1.09	0.38	0.27	0.90	
RC1147	500	12-10	0.210	#8		1.09	0.38	0.27	0.90	
10RC-10F	50	12-10	0.210	#10		1.09	0.38	0.27	0.90	
RC1157	500	12-10	0.210	#10		1.09	0.38	0.27	0.90	
10RC-14F	50	12-10	0.210	1/4		1.15	0.50	0.37	0.90	
RC1167	500	12-10	0.210	1/4		1.15	0.50	0.37	0.90	

Diagram



For multiple wire combinations per UL® file E9609, see page 14.