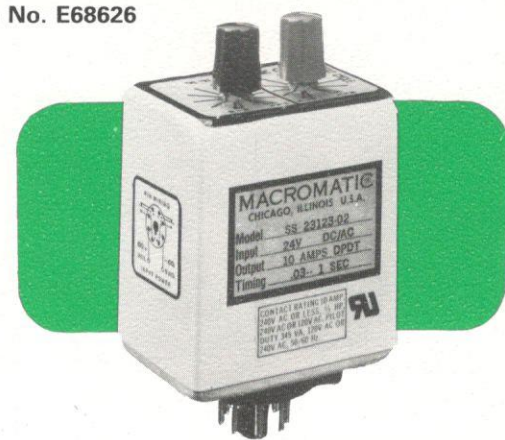


SOLID STATE[®] TIME DELAY RELAYS

SS 231 Series—Repeat Cycle Timers—Off-On
SS 251 Series—Repeat Cycle Timers—On-Off

- Steel Case and Frame—Industrial Strength
- Digital—C/Mos Circuitry—Accurate—Reliable
- Off and On Times Independently Adjustable (In Effect, Infinite Cams)
- 0.5% Repeatable Accuracy
- Suitable For Continuous Use
- Transient Protected—MOV—(10,000 V—20 Microseconds)
- Ambient Temperature Range—-40°F to 175°F
- Voltages From 12 VAC/DC to 240 VAC
- Operates on Either AC or DC
- Integrated Circuits For Accuracy and Reliability
- Extended Times (Up to 24 Hours)
- Cermet Potentiometer—Dustproof


**R.F. SHIELDED
STEEL CASE
AND FRAME**
**DIFFERENT OFF AND ON TIMES AVAILABLE IN SAME TIMER
SS 231 SERIES**

STOCK NUMBER	FUNCTION	OUTPUT	INPUT	TIMING	MECHANICAL
SS 23122-01	WHEN POWER IS APPLIED	DPDT 10 AMP RESISTIVE	120 VAC/DC 50/60 HZ	.02-.5 SEC	OCTAL 8 PIN PLUG-IN
SS 23122-02	PRE-SET			.03-1 SEC	
SS 23122-03	"OFF" TIME			.06-2 SEC	
SS 23122-04	BEGINS:			.2-5 SEC	
SS 23122-05	AT END OF			.3-10 SEC	
SS 23122-06	"OFF" TIME			.5-15 SEC	
SS 23122-07	CONTACTS			1.0-30 SEC	SS 70169 SOCKET SEE PAGE 35
SS 23122-08	TRANSFER			2.0-60 SEC	
SS 23122-09	FOR PRE-SET			4.0-120 SEC	
SS 23122-10	"ON" TIME:			6.0-180 SEC	
SS 23122-12	WHEN			10-300 SEC	
SS 23122-13*	"ON" TIME			15-450 SEC	STEEL CASE
SS 23122-22*	FINISHES			20S-10 Min.	
SS 23122-14*	"OFF" TIME			.5-15 Min.	
SS 23122-15*	BEGINS AGAIN			1-30 Min.	
SS 23122-16*	AND CYCLE			2-60 Min.	INTERNAL STEEL FRAME
SS 23122-17*	REPEATS			4 Min.-2 Hr.	
SS 23122-18*	UNTIL			6 Min.-3 Hr.	
SS 23122-19*	POWER			8 Min.-4 Hr.	
SS 23122-20*	REMOVED			15 Min.-8 Hr.	
SS 23122-21*				25 Min.-12 Hr.	
SS 23122-23*				50 Min.-24 Hr.	

SS 251 SERIES

SS 25122-XX	ACTION IS SAME AS ABOVE EXCEPT "ON" TIME FOLLOWED BY "OFF" TIME	DPDT 10 AMP RESISTIVE	120 VAC/DC 50/60 HZ	SAME AS SS 231 SERIES LAST TWO DIGITS SPECIFY TIMING EXAMPLE: -07 = 1-30 SEC	SAME AS SS 231 SERIES
-------------	---	-----------------------------	---------------------------	---	-----------------------

*Price Includes Dual Pilot Lights 12 VAC/DC, 24 VAC/DC, and 240 VAC also available EXAMPLE

Protected against momentary timing cycle interrupt transfer. 12 VAC/DC—SS 23126 Plus Terminal Digits To Indicate Timing.

24 VAC/DC—SS 23128

240 VAC—SS 23121

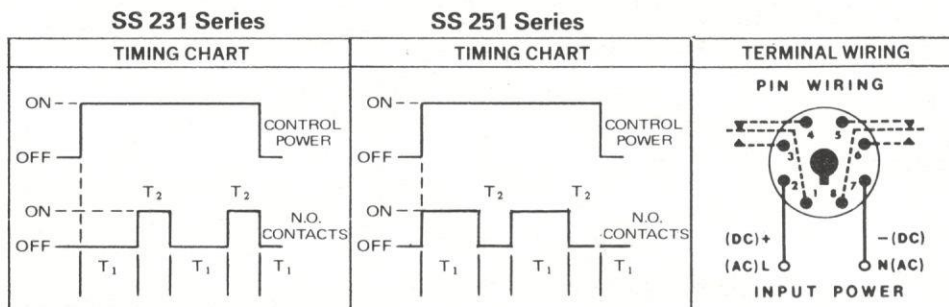
NOTE: SS 23123—24 VDC

REPLACED BY

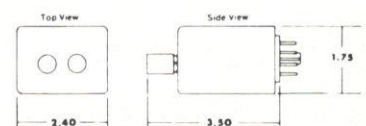
SS 23128—24 VAC/DC

For fixed time (at no extra charge) use basic stock number plus letter "F" and indicate time desired. Example SS 23122-F 30 Sec.—F 10 Min. = timer with OFF time 30 Sec. and ON time 10 Min.

Different OFF and ON Times Available in Same Timer.


EXAMPLE

SS23122-02-07 has .03-1 sec. Off Time and 1.0 to 30 sec. On Time adjustable in same timer. Longest time determines price.

Dimensions

MACROMATIC INC.

4635 WEST LAWRENCE AVENUE CHICAGO, ILLINOIS 60630 (312) 286-7977

TOLL FREE: 1-800-237-3762—Ext. 824