

Type TXG Subminiature Time Delay Fuse



www.optifuse.com

(619) 593-5050

Agency Standards and Listings:



Time Characteristics:

100%	200%	300%	400%
4 h Min	1s Min	200ms Min	20ms Min
	60s Max	3s Max	100ms Max

Interrupt Rating:

375mA~7A 30A at 250VAC

Packaging in Bulk:

No suffix – ammo pack – 4000 pcs


TR suffix – Tape and Reel – 4000 pcs, EIA-296

Part number:

TXG-XX – Ammo pack

TXG-XX-TR – Tape and Reel

Mechanical Dimensions: Inches[mm]

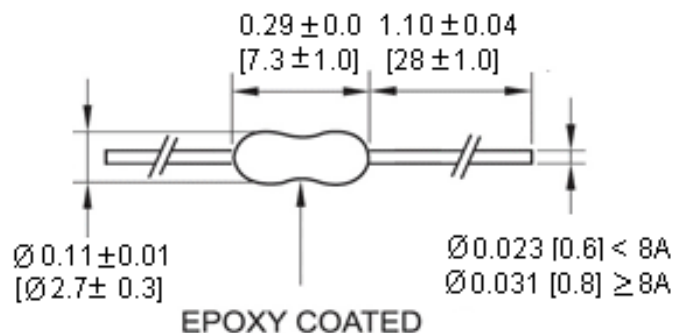

Part Number	Amperage	Agency Approval				I ² T Reference A ² Sec.	Rated Voltage (VAC)
		CCC	CQC	UR(CUR)	CSA		
TXG-375mA	375mA			•	•	0.203	250V
TXG-400mA	400mA			•	•	0.218	
TXG-500mA	500mA	•		•	•	0.360	
TXG-600mA	600mA			•	•	0.382	
TXG-630mA	630mA	•		•	•	0.396	
TXG-750mA	750mA			•	•	0.810	
TXG-800mA	800mA	•		•	•	0.836	
TXG-1A	1A	•		•	•	1.690	
TXG-1.2A	1.2A			•	•	2.078	
TXG-1.25A	1.25A	•		•	•	2.465	
TXG-1.5A	1.5A			•	•	4.000	
TXG-1.6A	1.6A	•		•	•	5.645	
TXG-2A	2A	•		•	•	7.290	
TXG-2.5A	2.5A	•		•	•	14.44	
TXG-3A	3A			•	•	26.18	
TXG-3.15A	3.15A	•		•	•	18.75	
TXG-3.5A	3.5A			•	•	19.59	
TXG-4A	4A	•		•	•	39.08	
TXG-5A	5A		•	•	•	57.76	
TXG-6A	6A			•	•	94.40	
TXG-6.3A	6.3A		•	•	•	95.95	
TXG-7A	7A			•	•	98.01	

• for Approved

Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of Fuse device with chemical solvent. Prolonged contact may damage the device performance.

Note: All specifications subject to change without notice.

Rev C 02/2014 - Page: 1/2
Code: H01-01H


Type TXG Subminiature Time Delay Fuse



www.optifuse.com

(619) 593-5050

Time Current Curve Graph

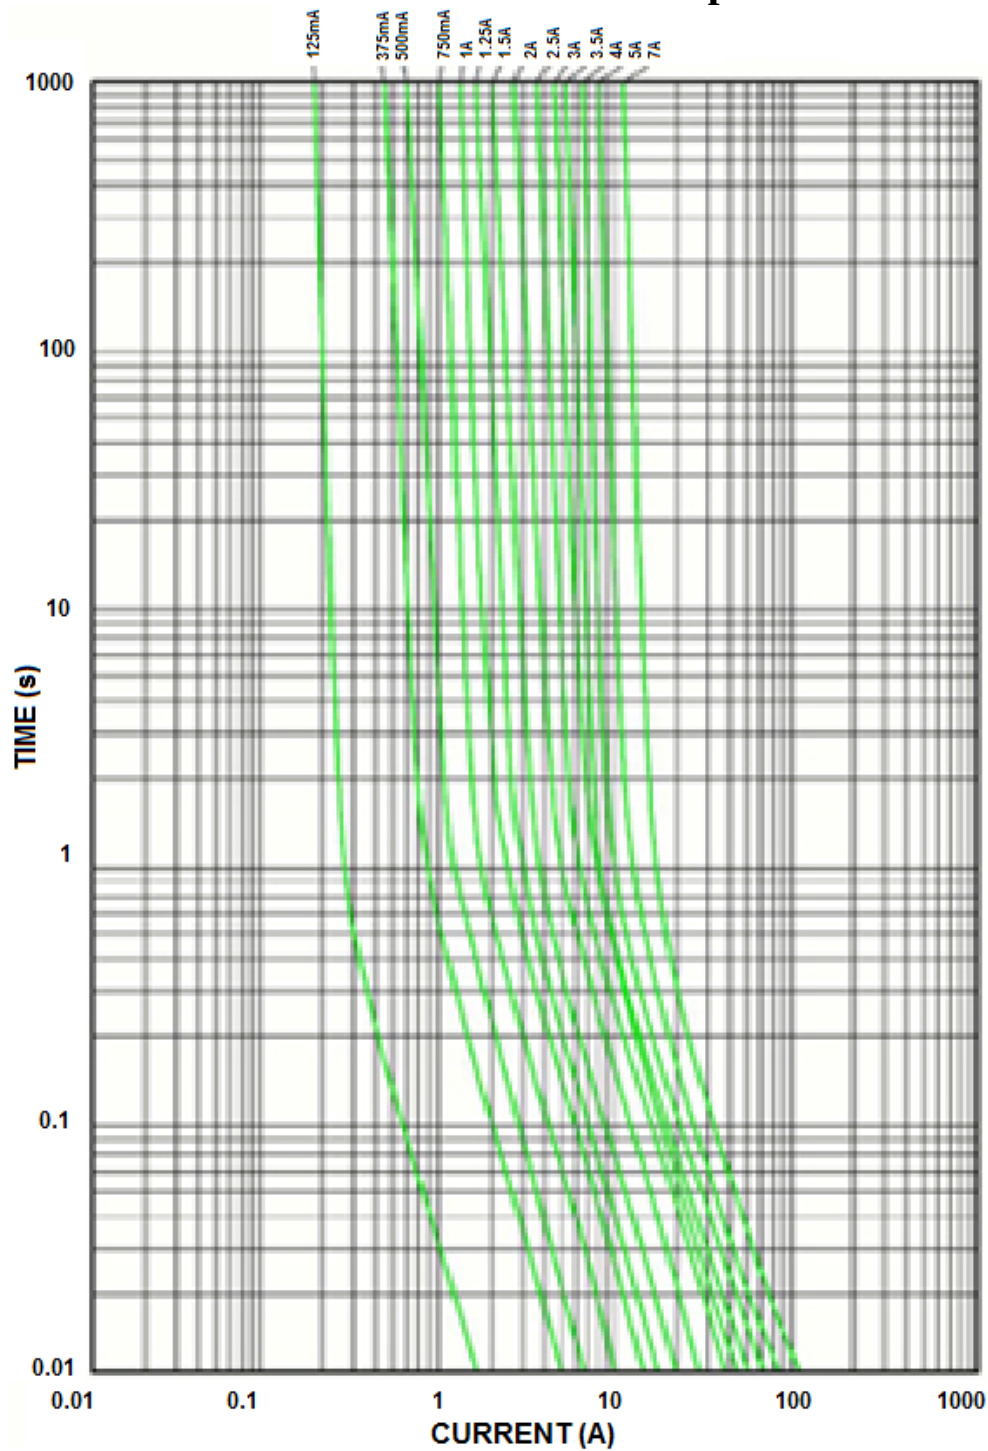

Note: All specifications subject to change without notice.

Rev C 02/2014 - Page: 2/2
Code: H01-01H