


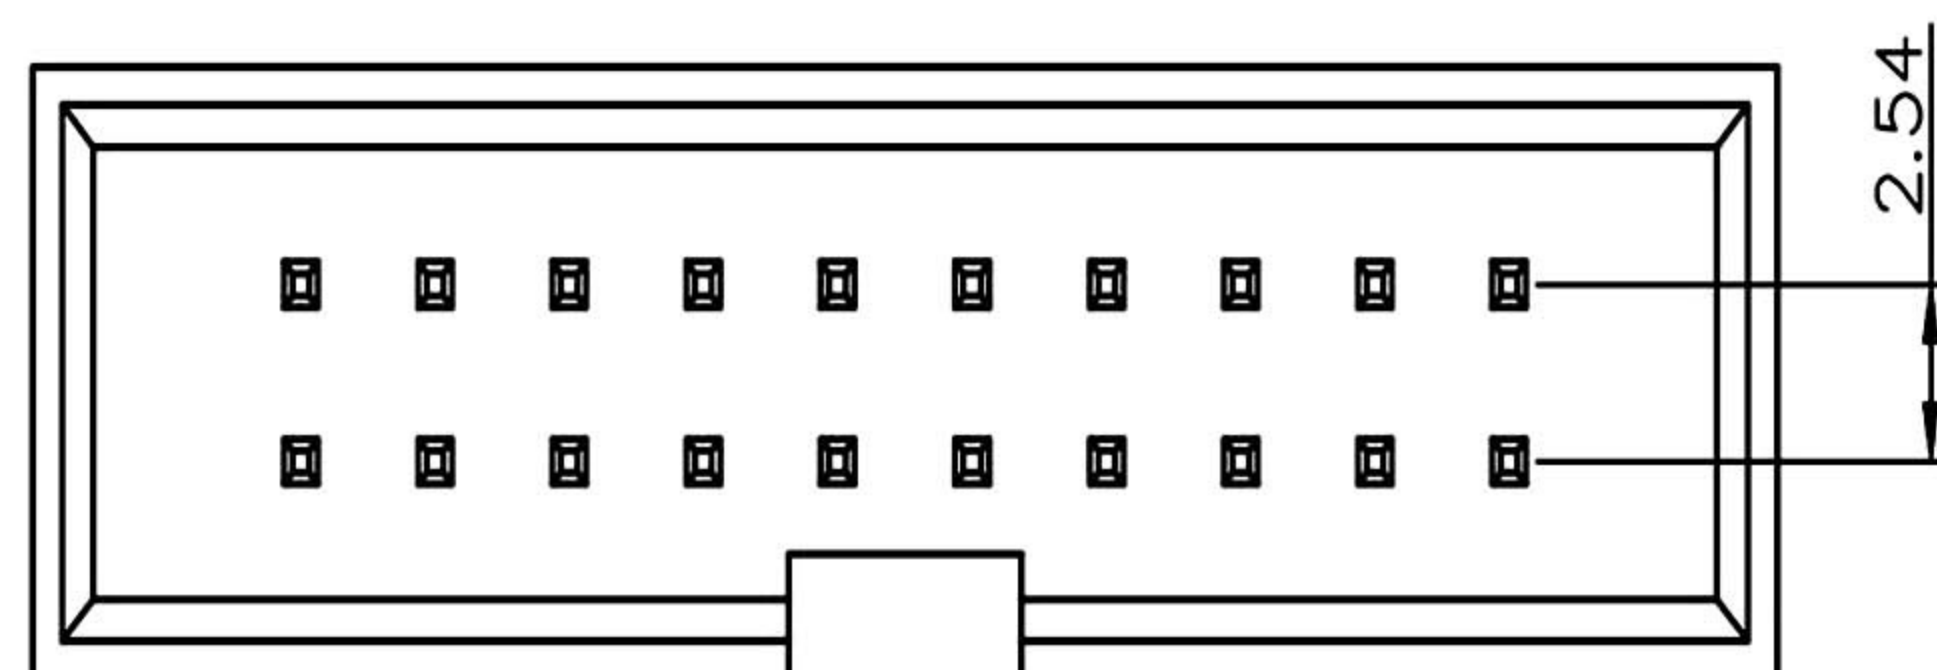

SPECIFICATIONS

Current Rating : 3AMP

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Resistance: 20m Ω Max.

Insulation Resistance: 1000M Ω Min.



Withstanding Voltage: AC 1000V

Insulator Material: Polyester(UL94V-0)

Standard: PA6T


Contact Material: Brass

Contact plating: Au or Sn

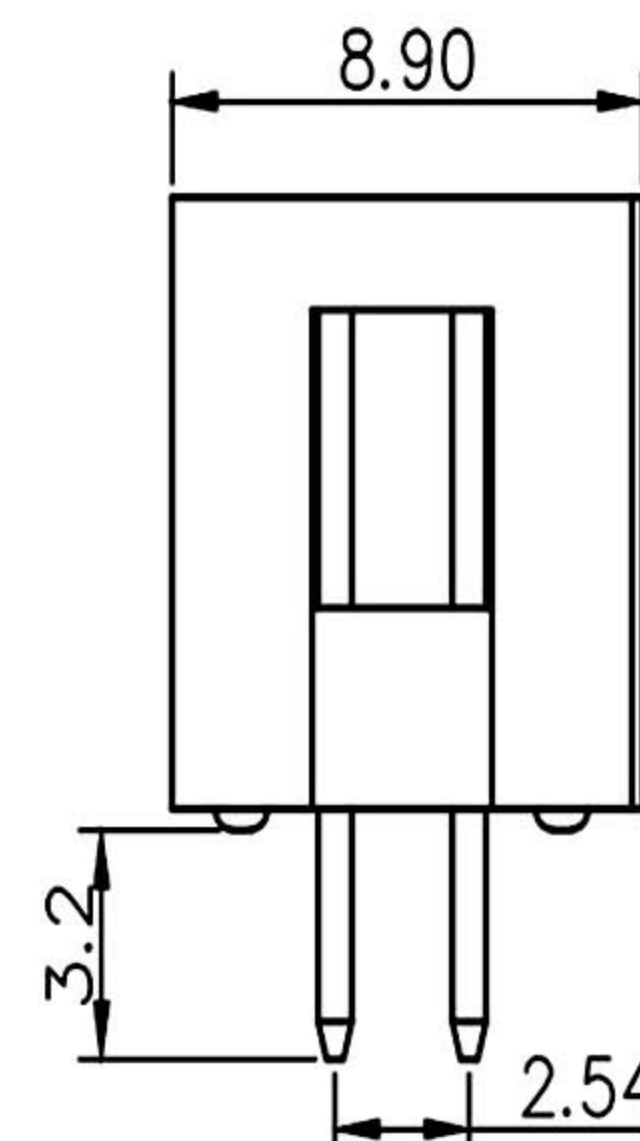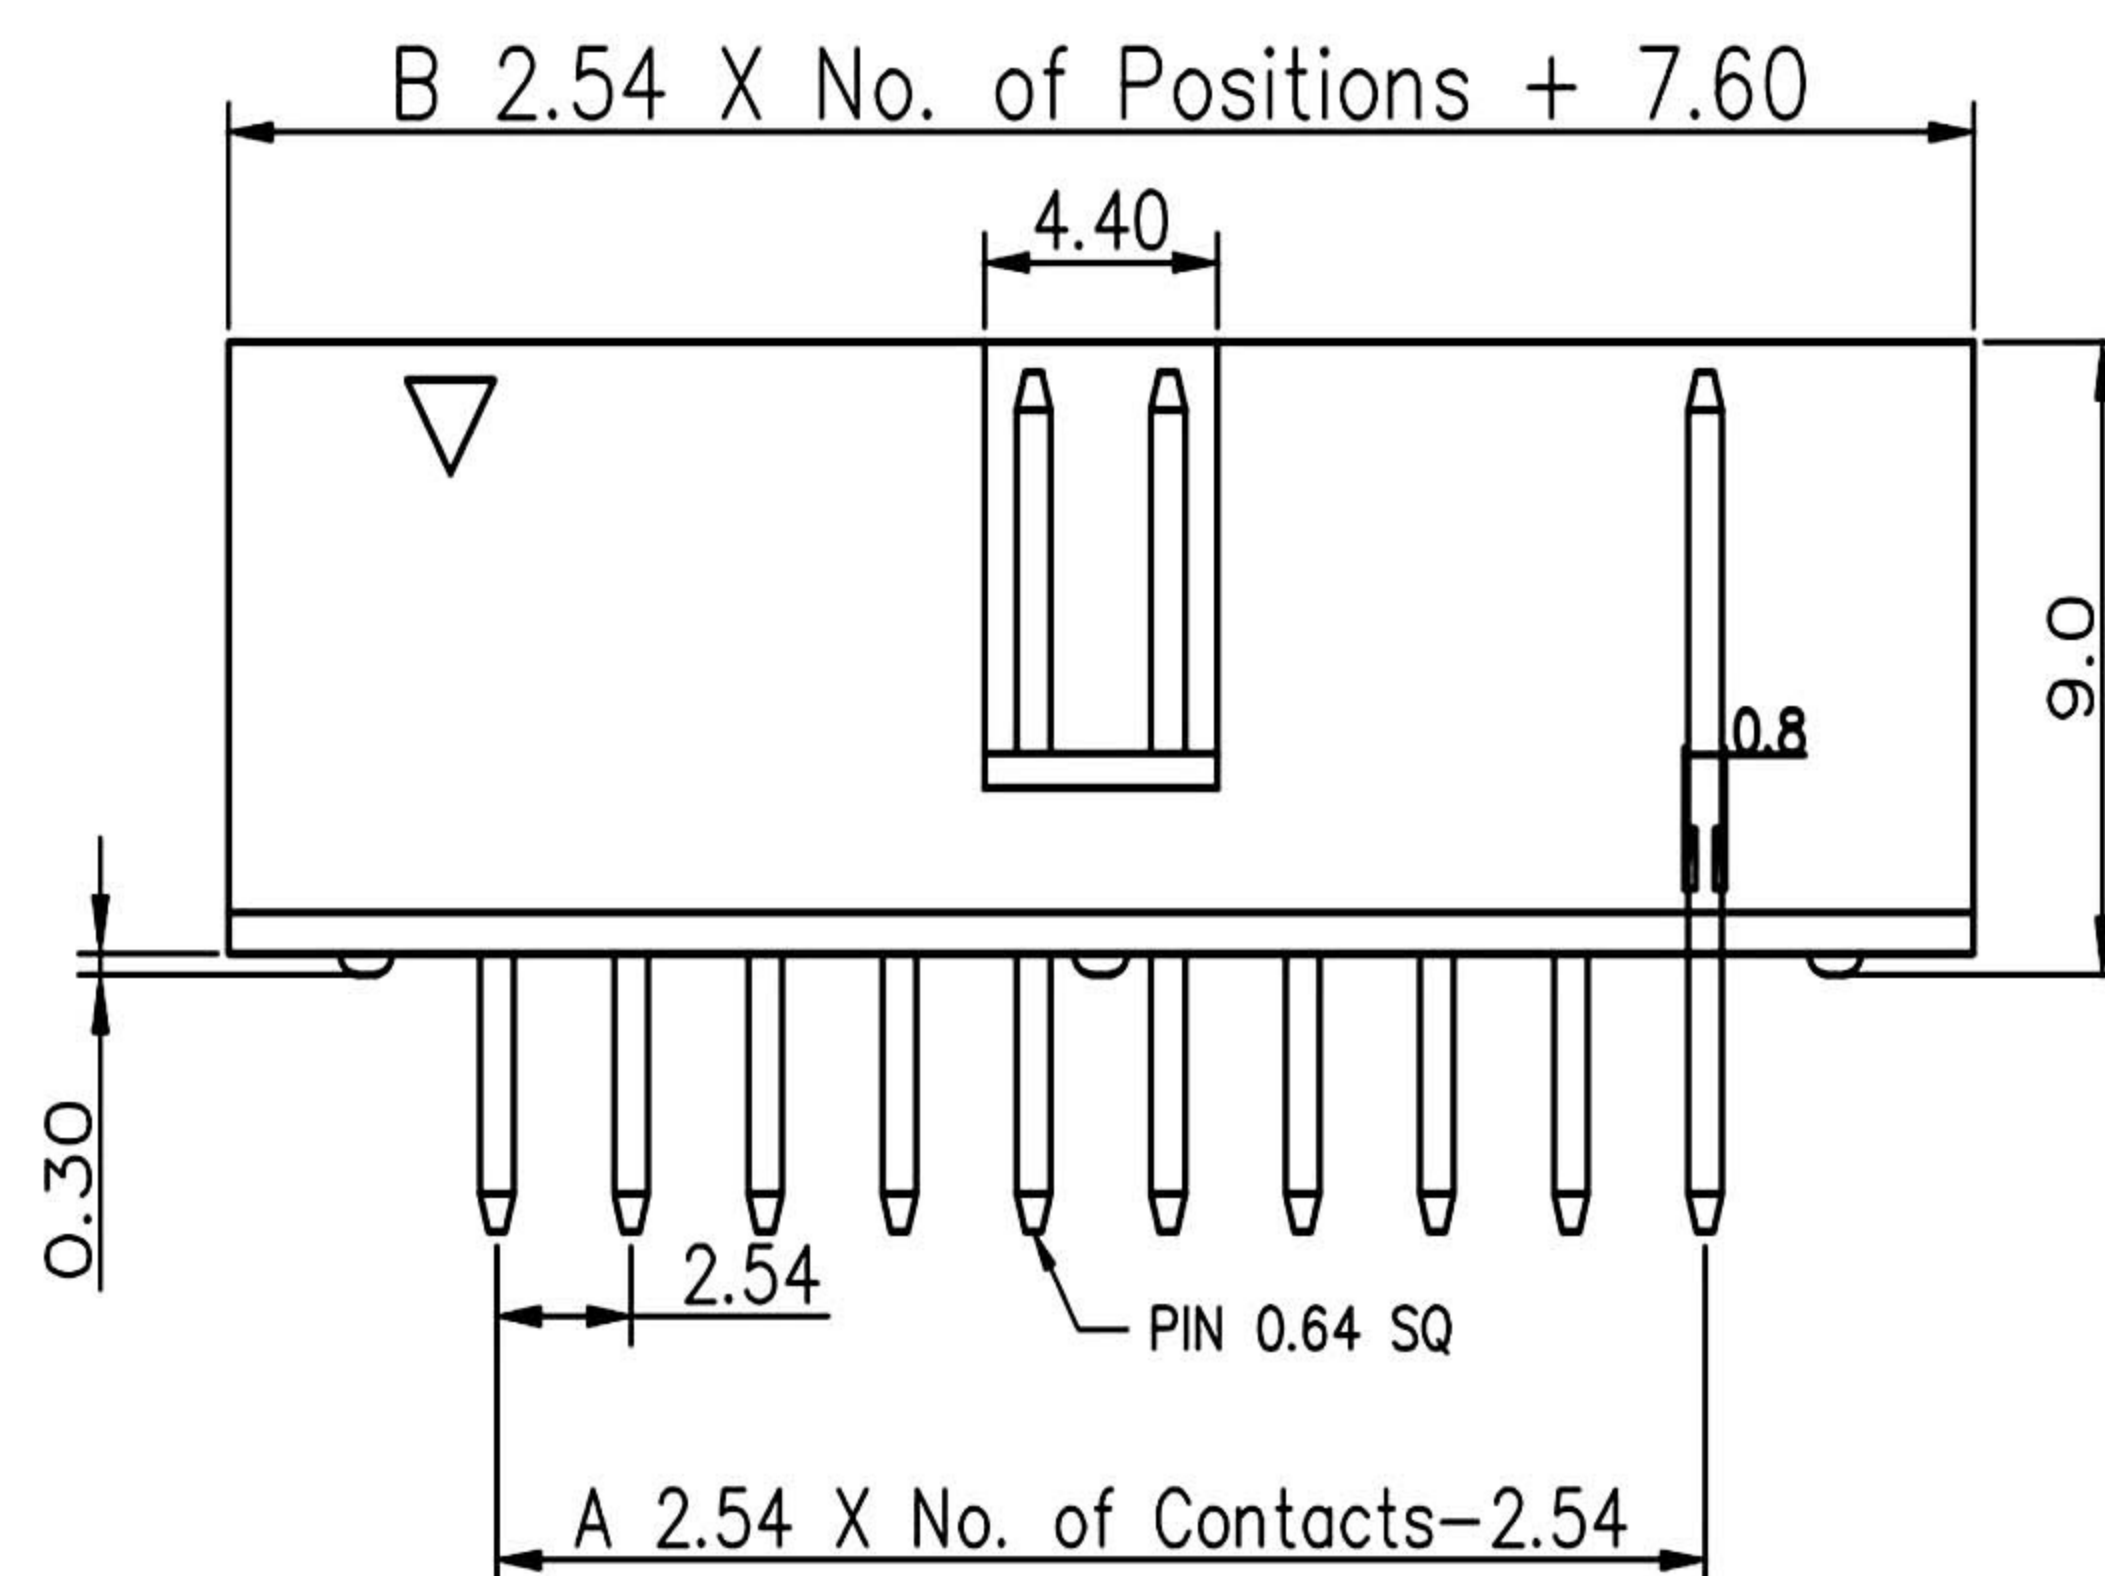

Dimensions list

Contacts Per row	Dimensions	
	A	B
6P	5.08	15.24
8P	7.62	17.78
10P	10.16	20.32
14P	15.24	25.40
16P	17.78	27.93
20P	22.86	33.01
24P	27.94	38.09
26P	30.48	40.63
30P	35.56	45.71
34P	40.64	50.79
40P	48.26	58.41
50P	60.96	71.11
60P	73.66	83.82
64P	78.74	88.90

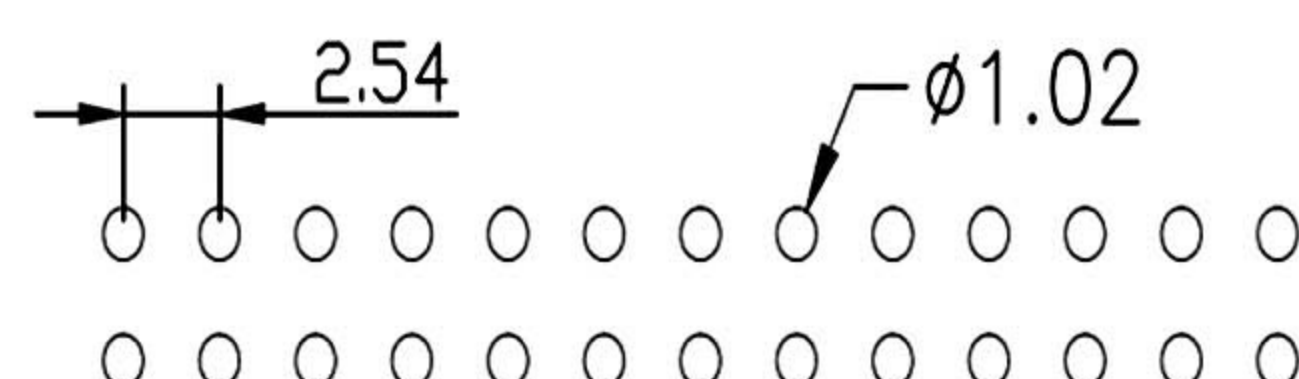

PCB LAYOUT

RoHS
Compliant

APPD.
核准

DWG.
製圖

DATE 制表日

2025/07/29



SCALE

比 例	参 考
-----	-----

UNIT
單位

单 位	MM
PAGE	

PAGE
張數 1 OF 1

TOLERANCE	容許公差
-----------	------

.0	±	0.30
50	±	0.20

ANG.	$\pm$	3°
------	-------	----

SIZE.
紙張B十 A .

紙張尺寸	A 4
BEM	

REV.
版 次 A

PART NAME	品 名
-----------	-----

2.54MM X2.54MM BOX HEADER INNER-KINK TYPE
2XXXPIN STRAIGHT TYPE WITHOUT LOCATING PEG
MATERIAL:PA6T BLACK INSULATOR TRAY PACKING
ROHS

PART NO.	C3517-XXSLXBNH0R
料 號	