Type ACB2-PL Auto Reset Circuit Breaker Automotive Type I Plug-In Type



www.optifuse.com

(619) 593-5050

Specifications:

Auto Reset Type Circuit Breaker

Voltage: Up to 12V

Amperage: 10A, 15A, 20A, 25A, 30A, 35A, 40A

Material: Zinc plated Metal Cover


Conforms to American National Standard SAE J553

Operating Temperature: $-10^{\circ} \text{ F} \sim 150^{\circ} \text{ F}$ Storage Temperature: $-20^{\circ} \text{ F} \sim 200^{\circ} \text{ F}$

Current Rating:

Rating	Open Time
$100\% \pm 1.5\%$	> 30 Min
135% ± 1.5%	< 30 Min
200% ± 1.5%	< 1 Min

Mechanical Dimensions: Inches [mm]

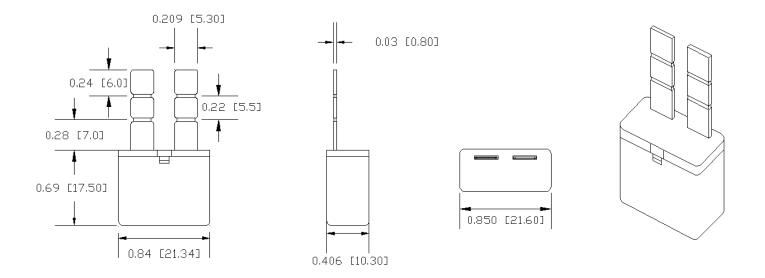

Warning:

-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.



- -Device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- -Avoid contact of device with chemical solvent. Prolonged contact may damage the device performance.