

CARTRIDGE TYPE

910/911 Series Lampholders for 900/901 Series Cartridge Lamps



The 910 series lampholders mate with any of the 900 series lamps. The 911 series lampholders mate with any of the 901 series lamps.

APPROVALS: Recognized under the Components Program of Underwriters Laboratories and Certified by CSA.

SPECIFICATIONS:

Housing and Knurled Ring Nut: Aluminum. Black anodized finish standard. Clear anodized finish optional. Other finishes available on special request. A mounting wrench, #097013, is available for tightening the knurled ring nuts.

Hex Nut: Brass; nickel finish.

Internal Tooth Lockwasher: Phosphor bronze; nickel finish.

Terminal Insulator: High dielectric phenolic per MIL-M-14F.

Terminals: Solder cup or turret pin: Phosphor bronze; gold-plated.


Solder lug: Beryllium copper; tin-plated.

Lens Caps: High temperature plastic (–55°C to +125°C)

Lens Marking: Lens style 21 may be stamped. Contact factory.

DIMENSIONS:

| Lampholder Body | Dimensions in Inches | |
|-----------------|----------------------|------|
| | A | B |
| 910 | 1.203 Max. | 9/16 |
| 911 | 1.281 Max. | 5/8 |

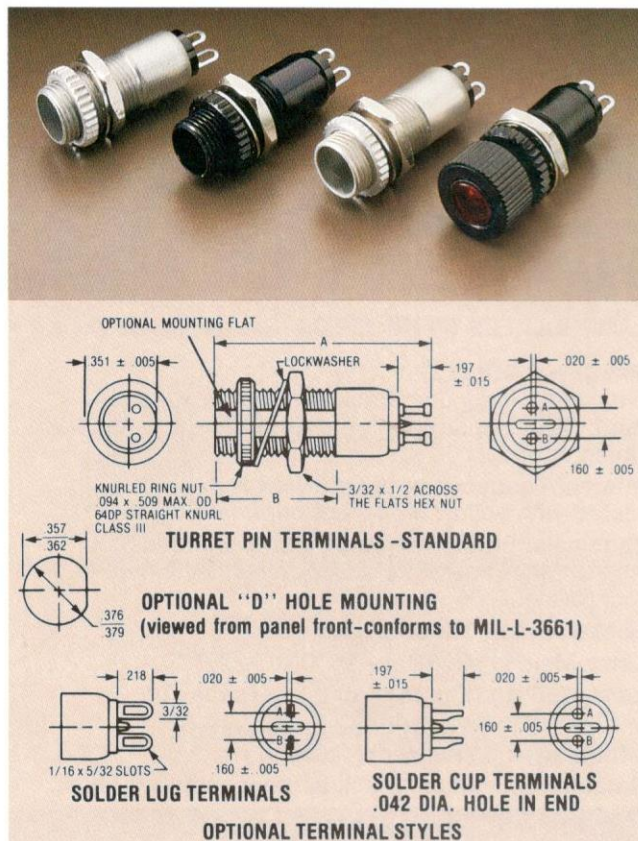

ORDERING INFORMATION:

Lampholders and lens caps may be ordered separately or as complete assemblies as shown in the example below:

EXAMPLE (Complete Assembly): 910 - 2 0 1 X - 21 1 BT

Lampholder Only Lens Cap Only

Solder Cup
Terminals

No special
feature

Black Anodized
Finish

Smooth Lens Cap

Black Anodized
Retainer

Blue Translucent
Lens Cap

| Cartridge Lampholders | | | | | Lens Caps and Collars | | |
|-----------------------|-------------------|-------------------|---------------------------|-----------------|---|---------------------------|----------------------|
| Series | Termination | Features | Finish | Resistor | Lens Style | Lens Retainer Finish | Lens Color |
| 910 | 2 Solder Cup | 0 None | 1 Black Anodized-Standard | X None Required | 21 Smooth Lens | 1 Black Anodized | NONDIFFUSING (Clear) |
| 911 | 3 Turret-standard | 1 D Hole Mounting | 2 Clear(Silver) Anodized | | 27 Fluted Lens (Nondiffusing Colors Only) | 2 Clear (Silver) Anodized | |
| | 4 Solder Lug | | | | 23' Collar | | |
| | | | | | 24' Collar | | |
| | | | | | | | |

¹ No lens color specified. Use XX in lens color slot. Example: 910-201X-231XX.

² Use with blue or green neon lamps in the 911 series. Not for use with neon cartridge lamps in the 910 series.

³ Not recommended for use with neon cartridge lamps.

TRANSLUCENT³

| | |
|----|--------|
| AT | Amber |
| BT | Blue |
| GT | Green |
| RT | Red |
| WT | White |
| YT | Yellow |