# Type ACB-12-N / ACB-24-N Auto Reset Circuit Breaker Automotive Type I Metal Without Bracket



www.optifuse.com

(619) 593-5050

### **Specifications:**

Auto Reset Type Circuit Breaker

Voltage: 12V or 24V

Amperage: 10A, 15A, 20A, 25A, 30A, 35A, 40A, 50A

Terminals: Battery – Copper Plate (0.58"), Auxiliary – Zinc Plate (0.66")

Conforms to American National Standard SAE J553


**Body: Steel Case** 


Operating Temperature:  $-10^{\circ}$  F  $\sim 150^{\circ}$  F Storage Temperature:  $-20^{\circ}$  F  $\sim 200^{\circ}$  F

#### **Current Rating:**

| Rating            | Open Time |
|-------------------|-----------|
| $100\% \pm 1.5\%$ | > 30 Min  |
| $135\% \pm 1.5\%$ | < 30 Min  |
| 200% ± 1.5%       | < 1 Min   |

## **Mechanical Dimensions: Inches [mm]**

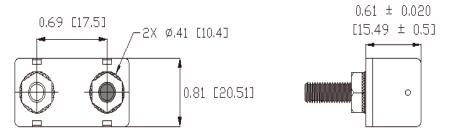

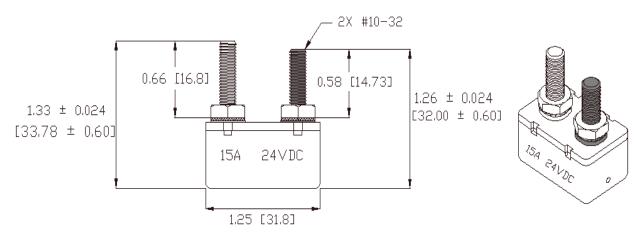

#### Warning:

-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.



- -Device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- -Avoid contact of device with chemical solvent. Prolonged contact will damage the device performance.

Note: All specifications subject to change without notice.

Rev D 07/2012 - Page: 1/1 Code Y01-02D